Text to accompany:

Open-File Report 79-1110

1979

COAL RESOURCE OCCURRENCE MAPS AND COAL DEVELOPMENT POTENTIAL MAPS OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

[Report includes 16 plates]

by

Dames & Moore

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

CONTENTS

	Page
Introduction	1
Purpose	1
Location	1
Accessibility	2
Physiography	2
Climate	2
Land status	3
General geology	3
Previous work	3
Geologic history	4
Stratigraphy	6
Structure	9
Coal geology	9
Fruitland 1 coal bed	13
Chemical analyses of the Fruitland 1 coal bed	13
Fruitland 2 coal bed	15
Chemical analyses of the Fruitland 2 coal bed	15
Fruitland coal zone	15
Chemical analyses of the Fruitland zone coal beds	16
Coal resources	16
Coal development potential	18
Development potential for surface mining methods	23
Development potential for subsurface mining methods	23
Development potential for in-situ (underground) gasification methods	24
References	25

CONTENTS

PLATES

Coal resource occurrence maps:

Plate 1. Coal data map

2. Boundary and coal data map

3. Coal data sheet

4. Isopach map of the Fruitland 1 coal bed

5. Structure contour map of the Fruitland 1 coal bed

6. Isopach map of overburden of the Fruitland 1 coal bed

7. Areal distribution and identified resources of the Fruitland 1 coal bed

8. Isopach map of the Fruitland 2 coal bed

9. Structure contour map of the Fruitland 2 coal bed

10. Isopach map of overburden of the Fruitland 2 coal bed

11. Areal distribution and identified resources of the Fruitland 2 coal bed

12. Isopach map of the total coal of the Fruitland coal zone

13. Structure contour map of the Fruitland coal zone

14. Isopach map of overburden and interburden of the Fruitland coal zone

Coal development potential maps:

15. Surface mining methods

16. Subsurface mining and in-situ gasification methods

CONTENTS

TABLES

		Page
Table 1.	Analyses of coal samples from the Menefee Formation	12
2.	Analyses of coal samples from the Fruitland Formation	14
3.	Strippable coal resources for Federal coal lands (in short tons) in the La Plata quadrangle, San Juan County, New Mexico, and La Plata County, Colorado	20
4.	Coal resource data for underground mining methods for Federal coal lands (in short tons) in the La Plata quadrangle, San Juan County, New Mexico, and La Plata County, Colorado	21
5.	Coal resource data for in-situ gasification (underground) methods for Federal coal lands (in short tons) in the La Plata quadrangle, San Juan County, New Mexico, and La Plata County, Colorado	22

LA PLATA 7 1/2-MINUTE QUADRANGLE

INTRODUCTION

Purpose

This text is to be used in conjunction with the Coal Resource Occurrence (CRO) Maps and Coal Development Potential (CDP) Maps of the La Plata quadrangle, San Juan County, New Mexico and La Plata County, Colorado. These maps were compiled to provide a systematic coal resource inventory of Federal coal lands in Known Recoverable Coal Resource Areas (KRCRA's) in the western United States. The work has been performed under contract with the Conservation Division of the U.S. Geological Survey (Contract No. 14-08-001-17172).

The resource information gathered in this program is in response to the Federal Coal Leasing Amendments Act of 1976 and is a part of the U.S. Geological Survey's coal program. The information provides basic data on coal resources for land-use planning purposes by the Bureau of Land Management, state and local governments, and the public.

Location

The La Plata 7 1/2-minute quadrangle is located in north-central San Juan County, New Mexico; the northern border of the quadrangle extends into La Plata County, Colorado. The area is approximately 12 miles (19 km) due north of Farmington, New Mexico.

Accessibility

The La Plata quadrangle is accessible from New Mexico State Route 17 which trends north-south through the central part of the quadrangle. Light-duty roads extend from State Route 17 and provide further access to the quadrangle area. The Atchison, Topeka, and Santa Fe Railway operates a route approximately 104 miles (167 km) south of the area at Gallup, New Mexico.

Physiography

This quadrangle is in the northwestern portion of the Central Basin area (Kelley, 1950) of the structural depression known as the San Juan Basin. Elevations range from 5,580 ft (1,701 m) in the south along the La Plata River to 6,780 ft (2,066 m) in the northwest. The La Plata River Valley occupies the central portion of the area and trends north-south. The majority of the area has low relief; however, the western and northwestern parts of the area are characterized by a dissected steep slope which is the flank of the Hogback Monocline.

Climate

The climate of the San Juan Basin is arid to semi-arid. Annual precipitation is usually less than 10 inches (25 cm) with slight variations across the basin due to elevational differences. Rainfall is rare in the early summer and winter; most precipiation is received in July and August as

intense afternoon thundershowers. Annual temperatures in the basin range from below 0°F (-18°C) to above 100°F (38°C). Snowfall may occur from November to April.

Land Status

Approximately 72 percent of the quadrangle is in the northwestern boundary of the San Juan Basin Known Recoverable Coal Resource area. The Federal Government owns the coal rights for approximately 74 percent of the KRCRA land within the quadrangle as shown on Plate 2 of the Coal Resource Occurrence Maps. A coal lease (NM 0135559) in the north covers approximately 6 percent of the quadrangle.

GENERAL GEOLOGY

Previous Work

Bauer and Reeside (1921) mapped the Fruitland Formation within the quadrangle with detailed emphasis on the outcrops of Fruitland coal and clinker. In 1924, Reeside mapped the various formations on a scale of 1:250,000 as part of a study of the Upper Cretaceous and Tertiary formations of the San Juan Basin. Hayes and Zapp (1955) published a geologic map of the Barker Dome-Fruitland area on a scale of 1:62,500. In addition to mapping the Upper Cretaceous rocks of the area, they mapped the outcrops of Fruitland and Menefee Formation coal beds and measured various coal-bearing sections.

More recently, Fassett and Hinds (1971) made subsurface interpretations of the Fruitland Formation coals in this area as part of a larger San Juan Basin coal study.

Geologic History

The San Juan Basin, an area of classic transgressive and regressive sedimentation, provided the ideal environment for formation of coals during Late Cretaceous time. At that time a shallow epeiric sea, which trended northwest-southeast, was northeast of the basin. The sea transgressed southwesterly into the basin area and regressed northeasterly numerous times; consequently, sediments from varying environments were deposited across the basin. Noncarbonaceous terrestrial deposition predominated during Paleocene and Eocene time.

After its first basin-wide retreat, the Late Cretaceous sea reversed the direction of movement. As a result, the transgressive sequence of paludal Menefee Formation, nearshore Cliff House Sandstone, and marine Lewis Shale was deposited in the quadrangle. Swamps (Menefee) formed southwest (shoreward) of the transgressing beaches (Cliff House). Organic matter deposited in these swamps ultimately formed coal in the Menefee Formation. Cliff House Sandstone beach sands were then deposited over the Menefee. The marine facies which developed northeast of the strandline as it moved to the southwest is the Lewis Shale. This thick sequence, which thins to the southwest, overlies the Cliff House Sandstone, and marks the last advance of the Late Cretaceous sea.

Evidence of the final retreat of the Late Cretaceous sea are the nearshore regressive Pictured Cliffs Sandstone and the overlying paludal Fruitland Formation which were deposited in successively higher stratigraphic positions to the northwest. Southwest (shoreward) of the beach deposits, swamps, which were dissected by streams, accumulated organic matter which later became coals of the Fruitland Formation. Deposition of organic material was influenced by the strandline as shown by both the continuity of the coal beds parallel to the north-south strandline in this part of the basin and their discontinuity perpendicular to it to the east.

The brackish-water swamp environment of the Fruitland moved northeast of the area as the regression continued in that direction. Terrestrial freshwater sediments then covered the quadrangle as indicated by the lacustrine, channel, and floodplain deposits of the Kirtland Shale. This sequence of events is evidenced by both an upward decrease in occurrence and thickness of Fruitland coals and a gradational change to noncarbonaceous deposits of the Kirtland. Continuous deposition during Late Cretaceous time ended with the Kirtland. The sea then retreated beyond the limits of the quadrangle area, and modern basin structure began to develop. An erosional unconformity developed in a relatively short time as part of the Cretaceous Kirtland Shale was removed.

Terrestrial deposition resumed in the Paleocene as represented by the Ojo Alamo Sandstone and the overlying Nacimiento Formation. Alluvial plain and floodplain deposits of the Ojo Alamo were followed by the thick, lithologically varied deposits of the Nacimiento during continuous nonmarine deposition. The Nacimiento was later exposed to erosion.

The Eocene San Jose Formation was subsequently deposited over the Nacimiento erosional surface, reflecting various nonmarine environments which developed across the basin. Deposition and structural deformation of the basin then ceased, and the warped strata of the San Juan Basin have been exposed to erosional processes to the present time. A significant amount of erosion has occurred, as indicated by the removal of the San Jose Formation and some of the Nacimiento Formation from the area.

Stratigraphy

The formations studied in this quadrangle range from Late Cretaceous to Paleocene in age. They are, in order from oldest to youngest: (two of the three formations of the Mesaverde Group) the Menefee Formation and Cliff House Sandstone; Lewis Shale, Pictured Cliffs Sandstone, Fruitland Formation, Kirtland Shale, Ojo Alamo Sandstone, and Nacimiento Formation. A composite columnar section on CRO Plate 3 illustrates the stratigraphic relationships of these formations and is accompanied by lithologic descriptions of the individual formations.

The oldest coal-bearing formation in the quadrangle is the Menefee Formation of the Mesaverde Group. In previous studies the Menefee has been divided into the Cleary Coal Member, the barren Allison Member, and an upper coal-bearing member (Beaumont and others, 1956). These members are referred to as the undifferentiated Menefee Formation for the purposes of this report only. The formation consists primarily of gray, carbonaceous to noncarbonaceous shale with plant fossils, light gray, kaolinitic sandstone, and lenticular coal beds. It has a total thickness of approximately 900 ft

(274 m) in this area. Coal beds of the Menefee Formation are exposed on the flanks of the Hogback Monocline. Due to the steep dip, however, a short distance to the east and southeast the Menefee Formation is more than 3,000 ft (914 m) deep (the study limit). Therefore, the total formational thickness is not shown on Plate 3 of the CRO maps.

The Cliff House Sandstone conformably overlies the Menefee Formation. This formation is about 200 ft (61 m) thick and consists of buff to light gray, micaceous, calcareous sandstone with a trace of glauconite and interbedded gray shale.

The marine Lewis Shale conformably overlies the Mesaverde Group. In contrast to the underlying Cliff House Sandstone, it is comprised predominantly of dark gray, micaceous, fossiliferous shale, interbedded gray, slightly calcareous siltstone, and interbedded gray sandstone. It averages 1,405 ft (428 m) in thickness in this area. The upper contact is gradational with the overlying Pictured Cliffs Sandstone, and, therefore, a definite and consistent contact is difficult to establish.

The Pictured Cliffs Sandstone consists of about 150 ft (46 m) of light gray, slightly kaolinitic sandstone interbedded with gray shale. The upper contact is more sharply defined than the basal contact, even though intertonguing with the overlying Fruitland Formation results in minor variations in the formational top and occurrence of local Fruitland coal beds in the sandstone. Since the formation is present throughout most of the basin and displays a distinctive character on geophysical logs, the authors have used the top as a lithologic datum for correlation of Fruitland coals.

The Fruitland Formation is the major coal-bearing unit in the quadrangle. It averages 480 ft (146 m) of gray to brown, carbonaceous to

noncarbonaceous shale, gray, slightly micaceous sandstone, and coal beds of varying thicknesses. The thickest and most continuous coal beds occur near the base of the formation, while discontinuous and lenticular coals are characteristic of the upper portion. The upper contact is gradational from nonmarine, lower coastal plain deposits of the Fruitland to upper coastal or alluvial plain deposits of the Kirtland Shale (Molenaar, 1977).

The freshwater deposits of the Kirtland Shale average 1,300 ft (396 m) in thickness in this area and are composed of light gray to gray-green, micaceous shale with scattered subrounded siderite grains, and light gray, slightly micaceous, glauconitic sandstone beds. The formation has previously been divided into several members by various authors; however, for the purpose of this report it was not necessary to distinguish between the individual members.

Unconformably overlying the Upper Cretaceous rocks is the Paleocene Ojo Alamo Sandstone. It consists of about 80 ft (24 m) of an andesitic, tuffaceous conglomerate containing pebble- to boulder-size clasts, with interbedded variegated shale and sandstone.

The nonmarine Paleocene Nacimiento Formation conformably overlies the Ojo Alamo Sandstone. Erosion has removed hundreds of feet of the Nacimiento from the area. In contrast with the Ojo Alamo, it consists primarily of light gray to black shale, gray to gray-green claystone, and sandstone.

The dip of beds forming the structural feature, the Hogback Monocline, causes the exposure of successively younger strata in a southeasterly direction. The oldest unit exposed is the Menefee Formation. The Menefee, Cliff House Sandstone, Lewis Shale, Pictured Cliffs Sandstone,

Fruitland Formation, Kirtland Shale, and Ojo Alamo Sandstone are all exposed in the northwestern part of the area along the flank of the Hogback Monocline. The Nacimiento, the youngest formation in the area, is exposed along the eastern margin of the Hogback Monocline and across the remainder of the quadrangle.

Structure

The La Plata quadrangle is in the Central Basin area (Kelley, 1950) of the major structural depression known as the San Juan Basin. The western end of the basin axis is about 3 miles (5 km) south of the quadrangle and trends eastward in an arcuate pattern across the northern part of the Central Basin area (Baltz, 1967). The Hogback Monocline trends north-south and east-west across the western and northern parts of the area, respectively. The dip direction of the strata is to the east and south, respectively. The dip of strata on the flanks of the monocline is steep, but a short distance to the east and southeast the dip angles decrease to approximately 1°. Reeside (1924) and Hayes and Zapp (1955) have measured the dip of the strata in this quadrangle, which ranges from 38° to 1°.

COAL GEOLOGY

Individual coal beds are not continuous across the San Juan Basin because the coal-related strata are progressively younger from southwest to northeast; the strata rise in steps due to minor transgressions which occurred during the overall retreat of the sea. However, for the exclusive

purpose of reserve and reserve base calculations, the Fruitland 1 and 2 coal beds have been correlated and mapped as if each were a single bed, continuous throughout the basin.

A lithologic datum was used for correlation of the coals (CRO Plate 3). The primarily marine sandstone units (Point Lookout, Pictured Cliffs) which underlie the coal-bearing formations (Menefee, Fruitland) were used as datums since they represent a more laterally continuous boundary than any of the overlying paludal, fluvial, and lacustrine deposits of the coal-bearing formations. Also, the sandstone units are generally more easily recognized on geophysical logs. As shown on CRO Plate 3, the tops of the sandstone units have been used as datums for the oil and gas test holes (El Paso Natural Gas Co., 1978, unpublished data in well log library, Farmington, New Mexico) and the coals have been correlated based upon their position relative to the datum. Correlations of Fruitland and Menefee coals in measured sections (Bauer and Reeside, 1921; Hayes and Zapp, 1955) are based upon previous correlations and geologic maps (Bauer and Reeside, 1921; Hayes and Zapp, 1955).

Two coal zones (Menefee, Fruitland) and three coal beds (Fruitland 1, Fruitland 2, Fruitland 3) were identified in this quadrangle (CRO Plate 1). The coals of the Menefee Formation are designated as the Menefee coal zone (Me zone). Several of these coals crop out in the western part of the quadrangle. Since the Menefee coals are generally noncorrelative, discontinuous, and less than reserve base thickness (5 ft [1.5 m]) as set by the U.S. Geological Survey, derivative maps were not constructed.

Menefee Formation coals in the northwestern part of the San Juan Basin vary from borderline subbituminous A-high volatile C bituminous to high

volatile B bituminous. The rank has been determined on a moist, mineral-matter-free basis with calorific values averaging 12,563 Btu's per pound (29,222 kj/kg) (Amer. Soc. for Testing and Materials, 1977). The coal is hard, brittle, and black with a bright luster. The coal readily slakes with exposure to weather; however, it stocks fairly well when protected. The "as received" analyses indicate moisture content varying from 5.6 to 11.3 percent, ash content ranging from 3.1 to 6.3 percent, sulfur content less than one percent, and heating values on the order of 11,993 Btu's per pound (27,896 kj/kg). Analyses of several Menefee coals are given in Table 1 (Bauer and Reeside, 1921; Hayes and Zapp, 1955; Shomaker and Whyte, 1977).

The Fruitland 1 (Fr 1) coal bed is defined by the authors as the lowermost coal of the Fruitland Formation; it is generally directly above the Pictured Cliffs Sandstone. The Fruitland 2 (Fr 2) coal bed occurs above the Fruitland 1. Both of these coal beds crop out in the northern and western portions of the quadrangle. The Fruitland 3 (Fr 3) coal bed occurs above the Fruitland 2 and crops out in the western part of the quadrangle. Since the Fruitland 3 is less than reserve base thickness (5 ft [1.5 m]) within the KRCRA, derivative maps were not constructed.

The remaining coals of the Fruitland Formation are designated as the Fruitland coal zone (Fr zone) which extends from the top of the Fruitland Formation to the base of the lowermost coal designated on CRO Plate 3 as a Fruitland zone coal bed. A coal bed of the Fruitland zone crops out in the north and west.

Fruitland Formation coals in the northwestern part of the San Juan Basin are considered high volatile B to high volatile A bituminous in rank. The rank has been determined on a moist, mineral-matter-free basis with

TABLE 1

Analyses of coal samples from the Menefee Formation

(Form of analysis: A, as received; B, moisture free; C, moisture and ash free)

U.S. Bureau Mines Lab No.	Well or Other Source	Location: Section	T.N.	R.W.	Approx. Depth Interval of Sample (ft.)	Form of Analysis	Proximate, percent: Moisture	Volatile matter	Fixed Carbon	Ash	Sulfur	Heating Value (Btu)	Remarks
J-58561	Harrion & Bayless #1, Union	9	29	15	2,494-2,500	A	5.6	40.4	47.7	6.3	0.8	12,740	
						B	——	42.7	50.7	6.6	0.9	13,490	
						C	——	45.8	54.2	——	1.0	14,450	
17750	Shiprock School Mine(?) (100 ft from entry) (Government Mine)	SW¼ 21	30	16	————	A	10.6	36.7	49.6	3.1	0.64	11,010	
						B	——	41.1	55.4	3.5	0.72	12,310	
						C	——	42.6	57.4	——	0.73	12,750	
A-46364	Shiprock School Mine (250 ft from entry)	21	30	16	————	A	9.8	38.7	46.5	5.0	——	11,870	
						B	——	42.9	51.5	5.6	——	13,170	
						C	——	45.4	54.6	——	1.5	13,940	
29006	Shiprock School Mine (350 ft from entry) (Government Mine)	SW¼ 21	30	16	————	A	10.1	39.9	45.8	4.2	0.85	12,010	
						B	——	44.4	50.9	4.7	0.95	13,370	
						C	——	46.6	53.4	——	1.00	14,020	
A-46365	Joe Duncan Mine (150 ft from entry)	21	30	16	————	A	10.5	39.1	47.2	3.2	——	12,240	
						B	——	43.7	52.7	3.6	——	13,670	
						C	——	45.3	54.7	——	1.0	14,180	
C-31312	Davidson Mine (tipple)	22	30	16	————	A	11.3	39.3	46.0	3.4	——	12,090	
						B	——	44.3	51.9	3.8	——	13,630	
						C	——	46.1	53.9	——	0.8	14,170	

To convert Btu's/lb to kj/kg, multiply Btu's/lb by 2.326.
To convert feet to meters, multiply feet by 0.3048.

calorific values averaging 14,196 Btu's per pound (33,020 kj/kg) (Amer. Soc. for Testing and Materials, 1977). The coal is hard, brittle, and black with a bright luster. The coal readily slakes with exposure; however, it stocks fairly well when protected. The "as received" analyses indicate moisture content varying from 1.7 to 6.9 percent, ash content ranging from 8.4 to 16.2 percent, sulfur content varying from 0.5 to 1.32 percent, and heating values on the order of 11,490 to 13,350 Btu's per pound (26,726-31,052 kj/kg). Analyses of several Fruitland Formation coals are given in Table 2 (Bauer and Reeside, 1921; Fassett and Hinds, 1971; Hayes and Zapp, 1955).

Fruitland 1 Coal Bed

The Fruitland 1 coal bed dips, in general, to the southeast as shown on the structure contour map (CRO Plate 5). The dip varies from as much as 45° at the outcrop to less than 1° in the eastern and southern portions of the map. Because of topography and dip, the overburden (CRO Plate 6) values range from zero at the outcrop to more than 2,400 ft (732 m) in the extreme southeastern corner of the map. The isopach map (CRO Plate 4) shows that the coal bed has a thickness of more than 30 ft (9.1 m) in the northeast part of the map. The thickness decreases in all directions, and the coal bed is absent from portions of the west, southwest, and southeast.

Chemical Analyses of the Fruitland 1 Coal Bed - Analyses of several coals of the Fruitland Formation from this quadrangle and the surrounding area are given in Table 2 (Bauer and Reeside, 1921; Fassett and Hinds, 1971; Hayes and Zapp, 1955).

TABLE 2

Analyses of coal samples from the Fruitland Formation

(Form of analysis: A, as received; B, moisture free; C, moisture and ash free)

U.S. Bureau Mines Lab No.	Well or Other Source	Location Section	T.N.	R.W.	Approx. Depth Interval of Sample (ft.)	Form of Analysis	Proximate, percent Moisture	Volatile matter	Fixed Carbon	Ash	Sulfur	Heating Value (Btu)	Remarks
B-15777	El Paso Nat Gas Case No. 9	SW¼ 8	31	11	2,710-2,740	A	1.7	40.3	47.0	11.0	0.7	13,350	
						B	—	41.0	47.9	11.1	0.7	13,580	
						C	—	46.1	53.9	—	0.8	15,280	
B-19884	Consolidated Oil & Gas Mitchell No. 1-5	SW¼ 5	31	12	2,215-3,000	A	2.4	39.4	47.3	10.9	0.5	13,090	
						B	—	40.4	48.5	11.1	0.5	13,410	
						C	—	45.5	54.5	—	0.6	15,100	
B-15141	Consolidated Oil & Gas Freeman No. 1-11	NE¼ 11	31	13	1,776-1,782	A	2.3	37.9	43.6	16.2	1.3	12,040	
						B	—	38.8	44.7	16.5	1.3	12,320	
						C	—	46.5	53.5	—	1.6	14,760	
17749	New Mexico Mine	7	32	12	————	A	6.6	33.4	44.9	13.1	0.66	11,490	
						B	—	37.9	48.0	14.1	0.71	12,300	
						C	—	44.1	55.9	—	0.83	14,310	
B-61247	Morgan Mine (tipple)	15	32	13	————	A	5.4	38.6	46.0	10.0	—	12,320	
						B	—	40.9	48.6	10.5	—	13,030	
						C	—	45.7	54.3	—	—	14,360	
B-61248	W.H. Thomas Mine (tipple)	15	32	13	————	A	5.4	40.0	46.2	8.4	—	12,650	
						B	—	42.2	48.9	8.9	—	13,380	
						C	—	46.4	53.6	—	—	14,680	
29250	Jones Mine (500 ft from entry)	SE¼ 21	32	13	————	A	6.9	38.1	43.1	11.9	1.32	11,630	
						B	—	41.0	46.2	12.8	1.42	12,500	
						C	—	47.0	53.0	—	1.63	14,330	
29249	W.H. Thomas Mine (500 ft from entry)	NW¼ 22	32	13	————	A	5.9	39.1	44.0	11.0	0.63	12,030	
						B	—	41.5	46.8	11.7	0.67	12,810	
						C	—	47.0	53.0	—	0.76	14,510	

To convert Btu's/lb to kj/kg, multiply Btu's/lb by 2.326.
To convert feet to meters, multiply feet by 0.3048.

Fruitland 2 Coal Bed

The Fruitland 2 coal bed dips in a southeasterly direction, as indicated by the structure contour map (CRO Plate 9). The dip varies from as much as 45° along parts of the outcrop to less than 1° in the east and south. As a result of topography and dip, the overburden (CRO Plate 10) varies in thickness from zero at the outcrop to more than 2,000 ft (610 m) in the eastern part of the map. As illustrated by the isopach map (CRO Plate 8) the coal bed is more than 25 ft (7.6 m) thick in the west-central portion of the map. In general, the thickness decreases in all directions, and the coal bed is absent from areas in the west and southeast parts of the map.

Chemical Analyses of the Fruitland 2 Coal Bed - Analyses of several coals of the Fruitland Formation from this quadrangle and the surrounding area are given in Table 2 (Bauer and Reeside, 1921; Fassett and Hinds, 1971; Hayes and Zapp, 1955).

Fruitland Coal Zone

The Fruitland coal zone extends from the top of the Fruitland Formation to the lowermost coal designated on CRO Plate 3 as a Fruitland zone coal bed. Therefore, the structure contour map (CRO Plate 13) is drawn on the top of the Fruitland Formation. It shows the coal zone dips toward the southeast, varying from as much as 45° in the west to less than 1° in the east. As a result of topography and dip, overburden (CRO Plate 14) varies from zero at the outcrop to greater than 2,000 ft (610 m) in the southeast. noncoal-bearing portion of the zone. Also shown on CRO Plate 14 is the

total amount of interburden which is the noncoal portion of the zone. The interburden values range from zero to greater than 500 ft (152 m) and reflect the stratigraphic spread of the coals in the formation. The isopach map (CRO Plate 12) shows the total coal thickness which is greater than 15 ft (4.6 m) in parts of the central, western, and northwestern portions of the quadrangle. The thickness decreases from these areas, and the coal is absent in the southwest, north-central, and northeast.

Chemical Analyses of the Fruitland Zone Coal Beds - Analyses of several coals of the Fruitland Formation from this quadrangle and the surrounding area are given in Table 2 (Bauer and Reeside, 1921; Fassett and Hinds, 1971; Hayes and Zapp, 1955).

COAL RESOURCES

Coal resource data from oil and gas wells (El Paso Natural Gas Co., 1978, unpublished data in well log library, Farmington, New Mexico) and geologic maps (Hayes and Zapp, 1955; Bauer and Reeside, 1921) were utilized in the construction of outcrop, isopach, and structure contour maps of coal beds in this quadrangle. Outcrops of the Fruitland 1, Fruitland 2, Fruitland 3, and Fruitland and Menefee zone coals in the north, northwest, and eastern parts of the quadrangle (CRO Plate 1) are modified from Hayes and Zapp (1955) and Bauer and Reeside (1921). The U.S. Geological Survey designated the Fruitland 1 and Fruitland 2 coal beds for the determination of coal resources in this quadrangle. Coals of the Fruitland zone and Menefee Formation were not evaluated because they are generally discontinuous and less than the reserve base thickness of 5 ft (1.5 m). The Fruitland 3 coal bed was not evaluated since it is less than 5 ft (1.5 m) thick within the KRCRA.

For Reserve Base and Reserve calculations, each coal bed was areally divided into measured, indicated, and inferred resource categories (CRO Plates 7 and 11) according to criteria established in U.S. Geological Survey Bulletin 1450-B. Data for calculation of Reserve Base and Reserves for each category were obtained from the respective coal isopach (CRO Plates 4 and 8) and areal distribution (CRO Plates 7 and 11) maps for each coal bed. The surface area of each isopached bed was measured by planimeter, in acres, for each category, then multiplied by both the average isopached thickness of the coal bed and 1,800 short tons of coal per acre-foot (13,239 tons/hectare-meter), the conversion factor for bituminous coal. This yields the Reserve Base coal, in short tons, for each coal bed.

In order to calculate Reserves, recovery factors of 85 percent and 50 percent were applied to the Reserve Base tonnages for strippable and underground coals, respectively. However, in areas of underground coal exceeding 12 ft (3.7 m) in thickness, the Reserves (mineable coal) were calculated on the basis of a maximum coal bed thickness of 12 ft (3.7 m) which represents the maximum economically mineable thickness for a single coal bed in this area by current underground mining technology.

Reserve Base and Reserve values for measured, indicated, and inferred categories of coal for the Fruitland 1 and Fruitland 2 beds are shown on CRO Plates 7 and 11, respectively, and are rounded to the nearest hundredth of a million short tons. Reserve values were not calculated for areas where the dip of the coal beds is greater than 15°. The total coal Reserve Base by section is shown on CRO Plate 2 and totals approximately 388 million short tons (352 million metric tons).

The coal development potential for each bed was calculated in a manner similar to the Reserve Base, from planimetered measurements, in acres, for areas of high, moderate, and low potential for surface and subsurface mining methods and moderate or low potential for in-situ gasification. The La Plata quadrangle has development potential for surface mining methods (CDP Plate 15), and subsurface mining and in-situ gasification methods (CDP Plate 16).

COAL DEVELOPMENT POTENTIAL

Coal beds of 5 ft (1.5 m) or more in thickness which are overlain by 200 ft (61 m) or less of overburden are considered to have potential for strip mining, and are designated as having high, moderate, or low development potential according to the mining ratios (cubic yards of overburden per ton of recoverable coal). The formula utilized in the calculation of mining ratios for bituminous coal is:

$$MR = \frac{t_o \ (0.896)}{t_c \ (rf)}$$

where MR = mining ratio
t_o = thickness of overburden
t_c = thickness of coal
rf = recovery factor

Based on economic and technological criteria, the U.S. Geological Survey has established standards for the determination of high, moderate, and low coal development potentials for surface, subsurface, and in-situ coal beds of reserve base thickness (5 ft [1.5 m]) or greater. Mining ratio

values for strippable coal (overburden less than 200 ft [61 m] thick) are 0 to 10, high; 10 to 15, moderate; and greater than 15, low. Underground coal beds (overburden 200 to 3,000 ft [610-914 m] thick) with a dip of less than 15° are evaluated for subsurface mining methods. They are assigned high, moderate, and low development potential according to the overburden thickness: 200 to 1,000 ft (61-305 m), high; 1,000 to 2,000 ft (305-610 m), moderate; and 2,000 to 3,000 ft (610-914 m), low.

Underground coal beds with dips ranging from 15° to 90° are evaluated for in-situ gasification methods. They are assigned moderate or low potential according to the dip angle and coal tonnages. Single coal beds or multiple, closely spaced bituminous coal bed(s) have moderate potential if the dip is 35° to 90° and there is a minimum reserve base of 50 million short tons (45 million metric tons) of coal. Single coal beds or multiple, closely spaced bituminous coal bed(s) have low development potential if: 1) the dip is 35° to 90° and the reserve base is less than 50 million short tons (45 million metric tons), or 2) the dip is 15° to 35°, regardless of the reserve base coal present. The areal distribution maps for this quadrangle (CRO Plates 7 and 11) show two lines connecting points of equal dip (15° and 35°) for the purpose of determining the in-situ coal development potential. Data for constructing these lines are taken from Hayes and Zapp (1955). Tables 3, 4, and 5 summarize the coal development potential, in short tons, for surface, underground, and in-situ (underground) coal, respectively, of the Fruitland 1 and Fruitland 2 coal beds.

TABLE 3

STRIPPABLE COAL RESOURCES FOR FEDERAL COAL LANDS
(IN SHORT TONS) IN THE LA PLATA QUADRANGLE,
SAN JUAN COUNTY, NEW MEXICO, AND LA PLATA COUNTY, COLORADO

[Development potentials are based on mining ratios (cubic yards of overburden/ton of underlying coal). To convert short tons to metric tons, multiply by 0.9072; to convert mining ratios in yd^3/ton coal to m^3/ton, multiply by 0.842]

Coal Bed	High Development Potential (0-10 mining ratio)	Moderate Development Potential (10-15 mining ratio)	Low Development Potential (15 mining ratio)	Total
Fruitland 2	30,000	50,000	90,000	170,000
Fruitland 1	4,830,000	660,000	250,000	5,740,000
TOTAL	4,860,000	710,000	340,000	5,910,000

TABLE 4

COAL RESOURCE DATA FOR SUBSURFACE MINING METHODS FOR FEDERAL COAL LANDS
(in short tons) IN THE LA PLATA QUADRANGLE,
SAN JUAN COUNTY, NEW MEXICO, AND LA PLATA COUNTY, COLORADO

(To convert short tons to metric tons, multiply by 0.9072)

Coal Bed	High Development Potential	Moderate Development Potential	Low Development Potential	Total
Fruitland 2	6,260,000	13,150,000	—	19,410,000
Fruitland 1	31,300,000	161,320,000	73,570,000	266,190,000
TOTAL	37,560,000	174,470,000	73,570,000	285,600,000

TABLE 5

COAL RESOURCE DATA FOR IN-SITU GASIFICATION (UNDERGROUND) MINING METHODS FOR FEDERAL COAL LANDS
(in short tons) IN THE LA PLATA QUADRANGLE,
SAN JUAN COUNTY, NEW MEXICO, AND LA PLATA COUNTY, COLORADO

(To convert short tons to metric tons, multiply by 0.9072)

Coal Bed	High Development Potential	Moderate Development Potential	Low Development Potential	Total
Fruitland 2	—	—	35,380,000	35,380,000
Fruitland 1	—	—	61,550,000	61,550,000
TOTAL	—	—	96,930,000	96,930,000

Development Potential for Surface Mining Methods

Small sections of strippable coal of the Fruitland 1 bed have high development potential in the western part of the quadrangle (CDP Plate 15) where the coal bed thickness ranges from 5 to 25 ft (1.5-7.6 m) (CRO Plate 4), and the overburden increases from zero at the outcrop to 200 ft (61 m) to the east (CRO Plate 6). A small area of unknown potential occurs in the northwest where the Fruitland 2 coal bed has less than 200 ft (61 m) of overburden (CRO Plate 10), however, it is less than the reserve base thickness of 5 ft (1.5 m) (CRO Plate 10). Remaining areas along the western to northwestern border of the area contain steeply dipping and strippable coal, however, it is limited in areal extent and, thus, was not evaluated for development potential. The remainder of the quadrangle area within the KRCRA contains coal with more than 200 ft (61 m) of overburden and has no development potential for surface mining methods.

Development Potential for Subsurface Mining Methods

Underground coal of the Fruitland 1 bed has high development potential in an east-west-trending strip in the northeastern part of the area (CDP Plate 16). The coal thickness in this area is 20 to 28 ft (6.1-8.5 m) (CRO Plate 4) and the overburden is approximately 800 to 1,000 ft (244-305 m) thick (CRO Plate 6). The Fruitland 2 coal bed has high potential in an area in the southwest corner of the quadrangle where the coal bed is 5 to 13 ft (1.5-4.0 m) thick (CRO Plate 8), and the overburden thickness ranges from 200 to 1,000 ft (61-305 m) (CRO Plate 10).

Areas with moderate and low development potential for the Fruitland 1 bed occur in the eastern half of the quadrangle (CDP Plate 16). The thickness of the Fruitland 1 in these areas ranges from 5 to 30 ft (1.5-9.1 m) thick (CRO Plate 4), and the overburden is 1,000 to 2,000 ft (305-610 m) thick (CRO Plate 6) in the moderate potential areas and 2,000 to more than 2,140 ft (610-652 m) thick in the areas with low development potential. The overburden generally increases in thickness toward the east to southeast. Coal of the Fruitland 2 bed has moderate potential in the southwest corner of the quadrangle where the coal bed is 5 to 10 ft (1.5-3.0 m) thick (CRO Plate 8), and the overburden ranges from 1,000 to 1,600 ft (305-488 m) thick (CRO Plate 10).

Several areas with unknown development potential occur in the southern half of the quadrangle area where the Fruitland 1 and Fruitland 2 coal beds are less than the reserve base thickness of 5 ft (1.5 m). Areas with no coal development potential occur just inside the KRCRA boundary where the Fruitland 1 crops out and the Fruitland 2 has been removed by erosion, inside the stripping limit, and in the extreme southeast corner of the quadrangle where there is no Fruitland 1 or Fruitland 2 coal.

Development Potential for In-Situ (Underground) Gasification Methods

Coal of the Fruitland 1 and Fruitland 2 beds has low potential for in-situ gasification in the west-central part of the quadrangle (CDP Plate 16) where each of the coal beds dip between 15° and 35°. In part of the west-central area the coal beds dip greater than 35° and have less than 50 million short tons (45.4 metric tons) of coal. These areas are also rated low development potential for in-situ gasification.

REFERENCES

American Soc. for Testing and Materials, 1977, Gaseous fuels; coal and coke; atmospheric analysis, in Annual book of ASTM standards, part 26: p. 214-218.

Baltz, E.H., Jr., 1967, Stratigraphy and regional tectonic implications of part of Upper Cretaceous and Tertiary rocks, east-central San Juan Basin, New Mexico: U.S. Geol. Survey Prof. Paper 552, p. 12.

Bauer, C.M., and Reeside, J.B., Jr., 1921, Coal in the middle and eastern parts of San Juan County, New Mexico: U.S. Geol. Survey Bull. 716-G, p. 177-178.

Beaumont, E.C., Dane, C.H., and Sears, J.D., 1956, Revised nomenclature of Mesaverde Group in San Juan Basin, New Mexico: Amer. Assoc. of Petroleum Geologists Bull., v. 40, no. 9, p. 2160.

El Paso Natural Gas Co., 1978, unpublished data in well log library, Farmington, New Mexico.

Fassett, J.E., and Hinds, J.S., 1971, Geology and fuel resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado: U.S. Geol. Survey Prof. Paper 676, 76 p.

Hayes, P.T., and Zapp, A.D., 1955, Geology and fuel resources of the Upper Cretaceous rocks of the Barker Dome-Fruitland area, San Juan County, New Mexico: U.S. Geol. Survey Oil and Gas Investigation Map OM-144, 1:62,500.

Kelley, V.C., 1950, Regional structure of the San Juan Basin in New Mexico Geol. Soc. Guidebook of the San Juan Basin, New Mexico and Colorado, 1st Field Conf., p. 102.

Molenaar, C.M., 1977, Stratigraphy and depositional history of Upper Cretaceous rocks of the San Juan Basin area, New Mexico and Colorado, with a note on economic resources in New Mexico Geol. Soc. Guidebook of the San Juan Basin III, Northwestern New Mexico, 28th Field Conf., p. 159-166.

Reeside, J.B., Jr., 1924, Upper Cretaceous and Tertiary formations of the western part of the San Juan Basin of Colorado and New Mexico: U.S. Geol. Survey Prof. Paper 134, p. 1-70.

Shomaker, J.W., and Whyte, M.R., 1977, Geologic appraisal of deep coals in San Juan Basin, New Mexico: New Mexico Bureau of Mines & Mineral Resources, Circular 155, 5 p.

U.S. Bureau of Mines and U.S. Geological Survey, 1976, Coal resource classification system of the U.S. Bureau of Mines and U.S. Geological Survey: U.S. Geol. Survey Bull. 1450-B, 7 p.

U.S. Department of the Interior, 1950, Map of portion of San Juan County, New Mexico and La Plata County, Colorado: U.S. Geol. Survey Oil and Gas Operations Map Roswell 90, revised 1973, 1:31,680.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 1 OF 16

EXPLANATION

DRILL HOLE - Shown solid oil and gas. Showing drill hole data, in feet. Index number refers to well on Plate 3 of CRO map.

LINE OF MEASURED SECTION - Showing rock interval and coal thickness, in feet. Index number refers to measured section on Plate 3 of CRO map.

GL - Ground level elevation
NR - No record
R - Rock interval
C - Coal interval
TD - Total depth
SEE - See record of lithology, interval thickness untested.

TEST HOLE AND MEASURED SECTION DATA SYMBOLS

Fr zone - Fruitland zone
Fr 3 - Fruitland 3 bed
Fr 2 - Fruitland 2 bed
Fr 1 - Fruitland 1 bed
Me zone - Menefee zone
L - Local bed

COAL BED AND COAL ZONE SYMBOLS AND NAMES

TRACE OF COAL BED OUTCROP - Showing coal thickness and rock interval, in feet, measured at triangle. Index number refers to measured section on Plate 3 of CRO map. Arrow points toward the coal-bearing area. Dashed line indicates inferred outcrop, dotted where concealed.

FAULT - Dashed where approximately located, bar and ball on downthrown side.

ABANDONED COAL MINE

PROSPECT

To convert feet to meters, multiply feet by 0.3048.

NR is an average of 300 ft (91 m) of casing. Actual depth of casing not shown.

Base from U.S. Geological Survey, 1963

Compiled in 1979

SCALE 1:24 000

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

QUADRANGLE LOCATION

MAP SHOWING LOCATION OF THE LA PLATA QUADRANGLE (SHADED) AND THE SAN JUAN BASIN KNOWN RECOVERABLE COAL RESOURCE AREA (STIPPLED), NEW MEXICO

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY
DAMES & MOORE
1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 1
COAL DATA MAP

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 2 OF 16

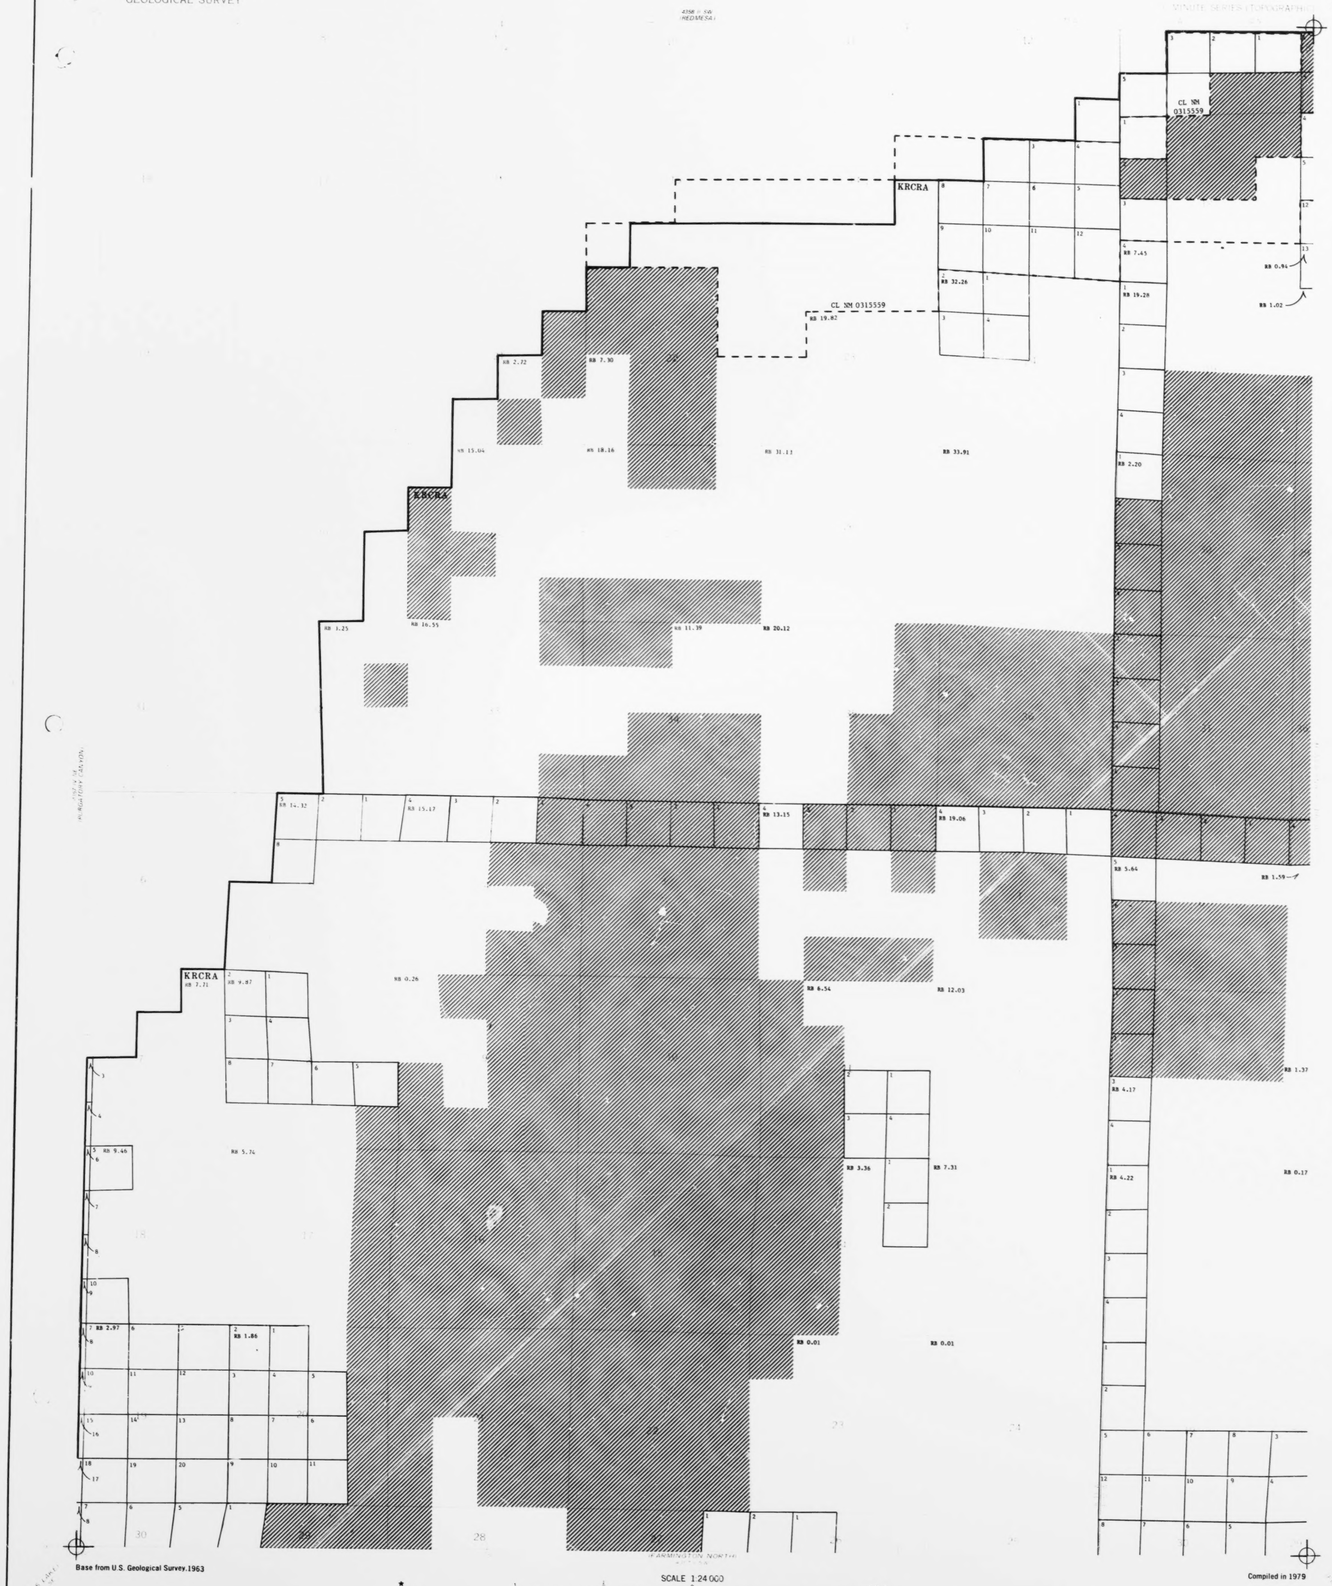

Base from U.S. Geological Survey, 1963

Compiled in 1979

SCALE 1:24 000

1 0 1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 0 1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET
GN MN
1°41' 13°
30 MILS 231 MILS

QUADRANGLE LOCATION
NEW MEXICO

EXPLANATION

KRCRA
KRCRA BOUNDARY - Label within KRCRA boundary.

NON-FEDERAL COAL LAND - Land within the KRCRA boundary for which the Federal Government does not own the coal rights.

CL NM 0315559
COAL LEASE - Showing lease number.

RB 2.97
TOTAL RESERVE BASE (RB) OF FEDERAL COAL PER SECTION - In millions of short tons, calculated for each section of federal land following the guidelines given in U.S. Geological Survey Bulletin 1450-B. To convert short tons to metric tons, multiply short tons by 0.9072.



SECTION OF LAND - Showing lots and lot numbers.

NOTE: BLM Coal Ownership Data current as of October 18, 1977.

REFERENCE

U.S. Bureau of Mines and U.S. Geological Survey, 1976, Coal resource classification system of the U.S. Bureau of Mines and U.S. Geological Survey: U.S. Geological Survey Bulletin 1450-B, 7 p.

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY

DAMES & MOORE

1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 2
BOUNDARY AND COAL
DATA MAP

COMPOSITE COLUMNAR SECTION

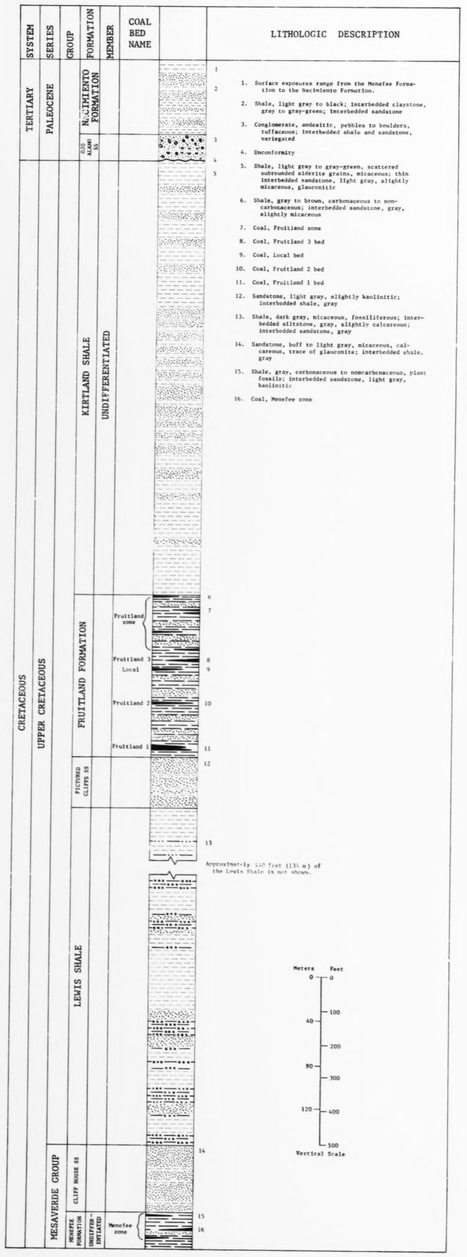
SYSTEM
SERIES
GROUP
FORMATION
MEMBER
COAL BED NAME
LITHOLOGIC DESCRIPTION
TERTIARY
PALEOCENE
CRETACEOUS
UPPER CRETACEOUS
NACIMIENTO FORMATION
OJO ALAMO SS
KIRTLAND SHALE
UNDIFFERENTIATED
FRUITLAND FORMATION
Fruitland zone
Fruitland 3
Local
Fruitland 2
Fruitland 1
PICTURED CLIFFS SS
LEWIS SHALE
MESAVERDE GROUP
MESAVERDE FORMATION
CLIFF HOUSE SS
UNDIFFERENTIATED
Menefee zone
1. Surface exposures range from the Menefee Formation to the Nacimiento Formation.
2. Shale, light gray to black; interbedded claystone, gray to gray-green; interbedded sandstone
3. Conglomerate, andesitic, pebbles to boulders, tuffaceous; interbedded shale and sandstone, variegated
4. Unconformity
5. Shale, light gray to gray-green, scattered subrounded siderite grains, micaceous; thin interbedded sandstone, light gray, slightly micaceous, glauconitic
6. Shale, gray to brown, carbonaceous to non-carbonaceous; interbedded sandstone, gray, slightly micaceous
7. Coal, Fruitland zone
8. Coal, Fruitland 3 bed
9. Coal, Local bed
10. Coal, Fruitland 2 bed
11. Coal, Fruitland 1 bed
12. Sandstone, light gray, slightly kaolinitic; interbedded shale, gray
13. Shale, dark gray, micaceous, fossiliferous; interbedded siltstone, gray, slightly calcareous; interbedded sandstone, gray
14. Sandstone, buff to light gray, micaceous, calcareous, trace of glauconite; interbedded shale, gray
15. Shale, gray, carbonaceous to noncarbonaceous, plant fossils; interbedded sandstone, light gray, kaolinitic
16. Coal, Menefee zone
Approximately 140 feet (134 m) of the Lewis Shale is not shown.
Meters
Feet
Vertical Scale

CORRELATION OF COAL BEDS IN DRILL HOLES

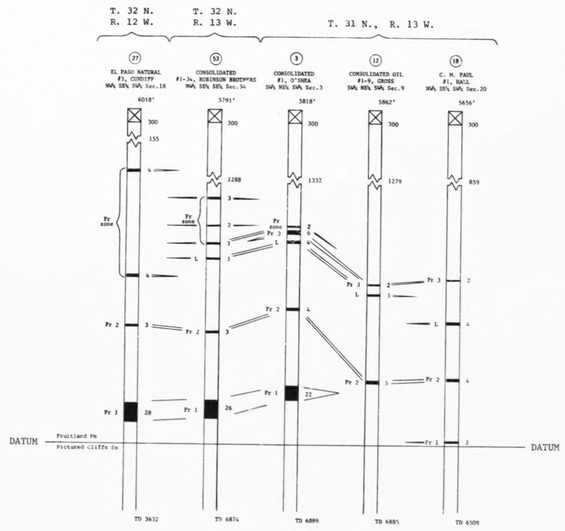

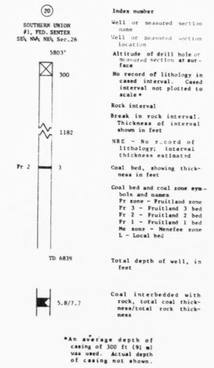
EXPLANATION
(20) SOUTHERN UNION #1, FED. SENTER SE¼, NW¼, NE¼, Sec.26
5803'
1182
TD 6839
5.8/7.7
Index number
Well or measured section name
Well or measured section location
Altitude of drill hole or measured section at surface
No record of lithology in cased interval. Cased interval not plotted to scale*
Rock interval
Break in rock interval. Thickness of interval shown in feet
NRI - No record of lithology; interval thickness estimated
Coal bed, showing thickness in feet
Coal bed and coal zone symbols and names
Fr zone - Fruitland zone
Fr 3 - Fruitland 3 bed
Fr 2 - Fruitland 2 bed
Fr 1 - Fruitland 1 bed
Me zone - Menefee zone
L - Local bed
Total depth of well, in feet
Coal interbedded with rock, total coal thickness/total rock thickness
*An average depth of casing of 300 ft (91 m) was used. Actual depth of casing not shown.

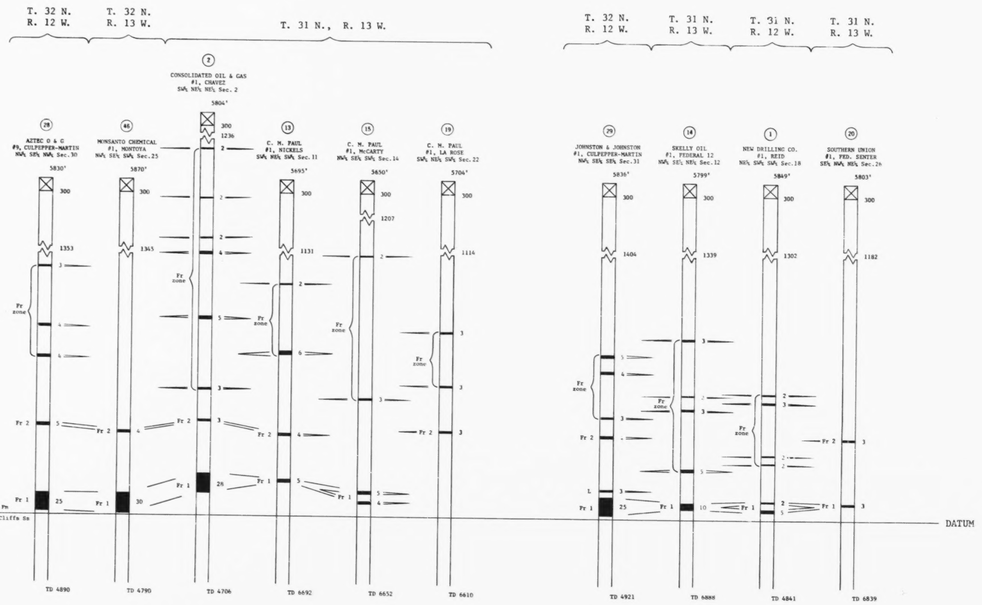
T. 32 N. R. 12 W.
T. 32 N. R. 13 W.
T. 31 N., R. 13 W.
(2) CONSOLIDATED OIL & GAS #1, CHAVEZ SW, NW, NW, Sec. 2
5804'
(28) AZTEC O & G #5, CULPEPPER-MARTIN NW, SW, NW, Sec. 30
5830'
TD 4890
(46) MONSANTO CHEMICAL #1, MONTOYA NW, SE¼, SW, Sec.25
5870'
TD 4790
C. M. PAUL #1, NICKELS SW, NE¼, SW, Sec.11
5695'
TD 4706
(15) C. M. PAUL #1, McCARTY NW, SE¼, SW, Sec.14
5650'
TD 6692
(19) C. M. PAUL #1, LA ROSE SW, NE¼, SW, Sec.22
5704'
TD 6652
TD 6610
DATUM
Fruitland Fm
Pictured Cliffs Ss
Fr zone
Pr 1
Pr 2
L

T. 32 N. R. 12 W.
T. 31 N. R. 13 W.
T. 31 N. R. 12 W.
T. 31 N. R. 13 W.
(29) JOHNSTON & JOHNSTON #1, CULPEPPER-MARTIN NW, SE¼, SE¼, Sec.31
5836'
TD 4921
(18) SKELLY OIL #1, FEDERAL 12 NW, SE¼, NE¼, Sec.12
5799'
TD 6888
(1) NEW DRILLING CO. #1, REID NE¼, SW, SW, Sec.18
5849'
TD 4841
(20) SOUTHERN UNION #1, FED. SENTER SE¼, NW¼, NE¼, Sec.26
5803'
TD 6839
DATUM
Fr zone
Pr 1
Pr 2
L

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY

DAMES & MOORE

1979

Compiled in 1979

PLATE 3
SHEET 1 OF 2
COAL DATA SHEET

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

OPEN FILE REPORT 79-1110

PLATE 3 OF 15

This map was prepared under contract to the U.S. Geological Survey and is preliminary and in conformity with Geological Survey editorial standards but may not conform to all standards. It does not necessarily represent those of the Geological Survey.

CORRELATION OF COAL BEDS IN DRILL HOLES AND MEASURED SECTIONS

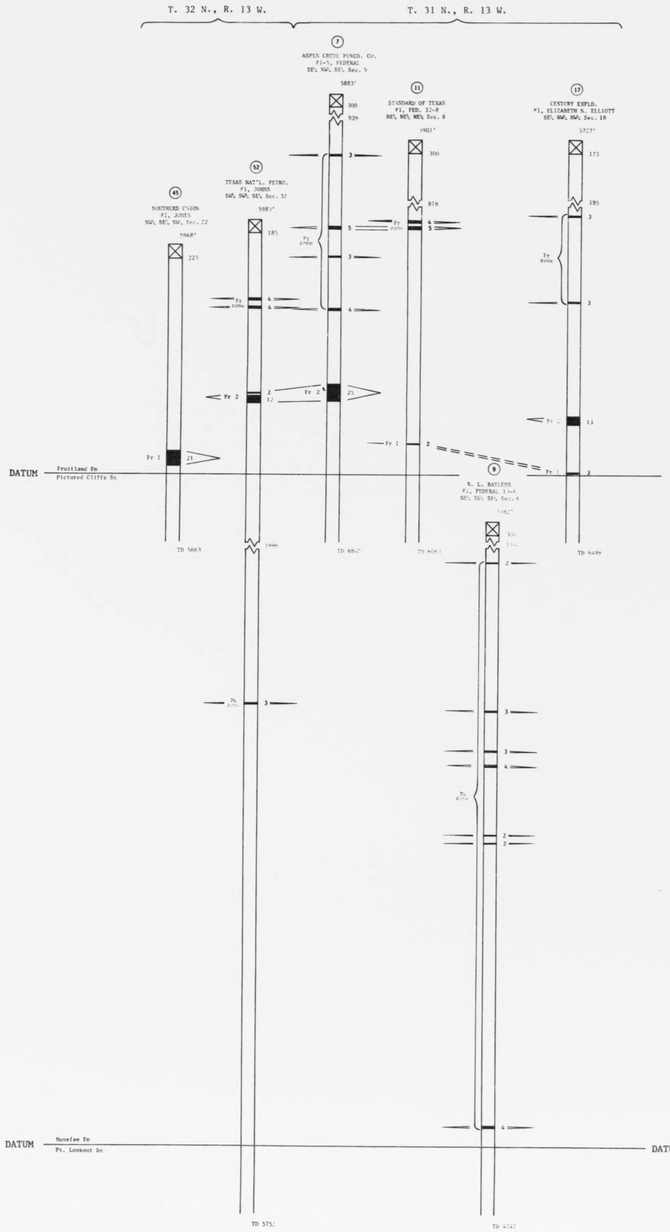
T. 32 N., R. 13 W.
T. 31 N., R. 13 W.
ASPEN CRTL. PUNCH. CO. #1-5, FEDERAL SE¼ NW¼ SE¼, Sec. 5
STANDARD OF TEXAS #1, FED. 12-8 NE¼ NE¼ NE¼ Sec. 8
CENTURY EXPLD. #1, ELIZABETH N. ELLIOTT SE¼ NW¼ NW¼ Sec. 18
SOUTHERN UNION #1, JONES NW¼ SE¼ NW¼ Sec. 22
TEXAS NAT'L. PETRO. #1, NOBBS SW¼ NW¼ SE¼ Sec. 32
R. L. BAYLESS #1, FEDERAL 31-6 NE¼ SE¼ SE¼ Sec. 6
DATUM
Fruitland Fm
Pictured Cliffs Ss
Nenefee Fm
Pt. Lookout Ss
TD 5663
TD 6499
TD 5751
TD 6742

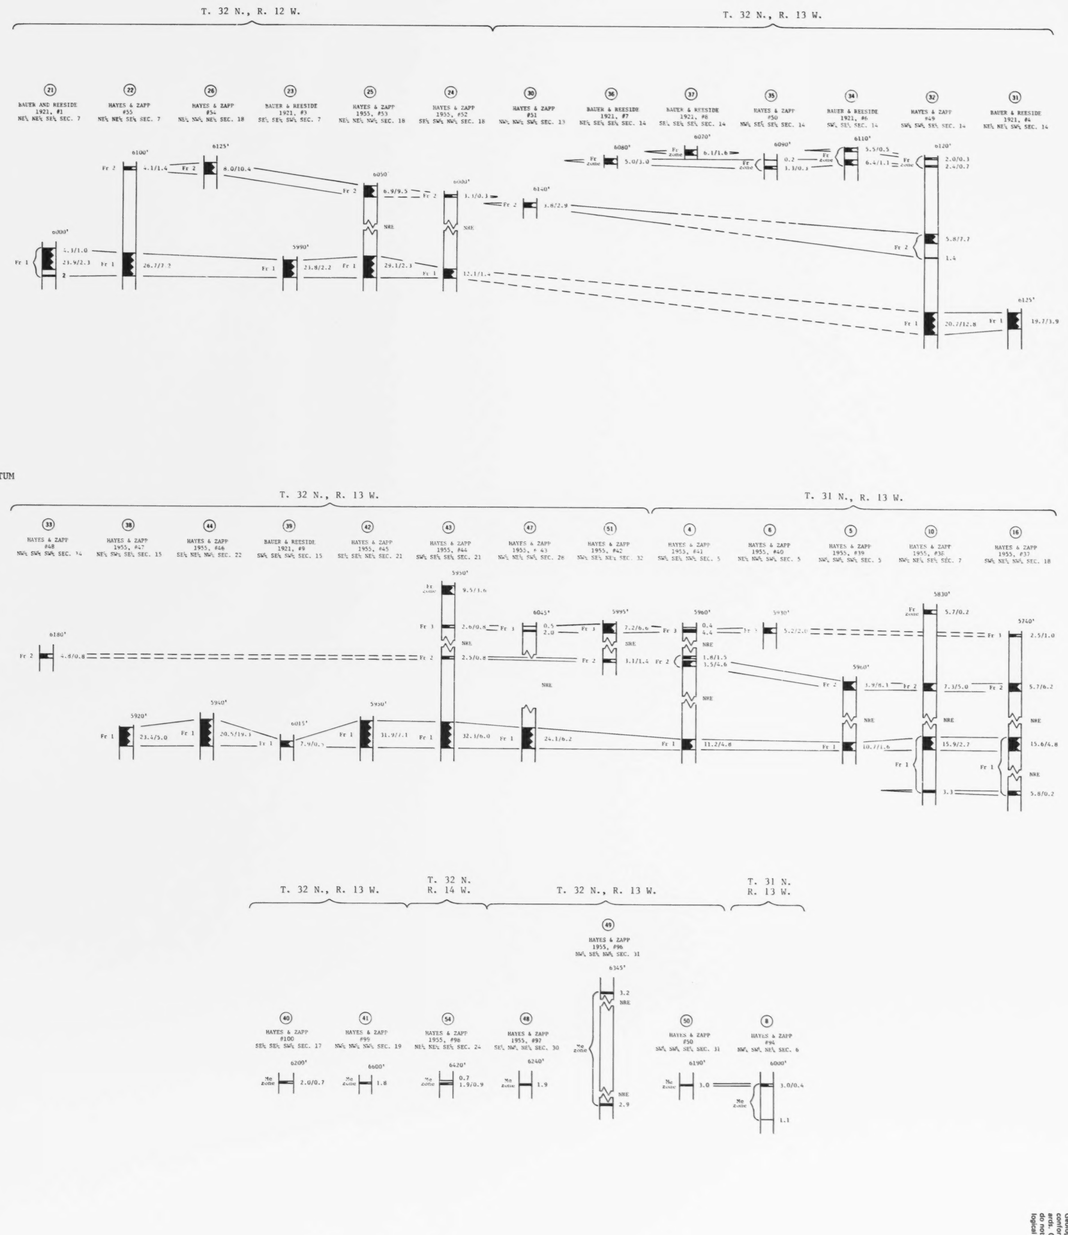
T. 32 N., R. 12 W.
T. 32 N., R. 13 W.
T. 31 N., R. 13 W.
BAUER AND REESIDE 1921, #1 NE¼ NE¼ SW¼ SEC. 7
HAYES & ZAPP #53 NE¼ NE¼ SE¼ SEC. 7
HAYES & ZAPP #54 NE¼ SW¼ NE¼ SEC. 18
BAUER & REESIDE 1921, #5 SE¼ SE¼ SW¼ SEC. 7
HAYES & ZAPP 1955, #53 NE¼ NE¼ NW¼ SEC. 18
HAYES & ZAPP 1955, #52 SW¼ SW¼ NW¼ SEC. 18
HAYES & ZAPP #51 NW¼ NW¼ SW¼ SEC. 23
BAUER & REESIDE 1921, #7 NE¼ SE¼ SE¼ SEC. 34
BAUER & REESIDE 1921, #6 SE¼ SE¼ SE¼ SEC. 14
HAYES & ZAPP #50 NW¼ NE¼ SE¼ SEC. 14
BAUER & REESIDE 1921, #8 SW¼ SE¼ SEC. 14
HAYES & ZAPP #49 SW¼ SW¼ SW¼ SEC. 14
BAUER & REESIDE 1921, #4 NE¼ NE¼ SW¼ SEC. 14
HAYES & ZAPP 1955, #44 SW¼ SW¼ SW¼ SEC. 21
HAYES & ZAPP 1955, + 43 NW¼ NE¼ SW¼ SEC. 28
HAYES & ZAPP 1955, #42 SW¼ SE¼ NE¼ SEC. 32
HAYES & ZAPP 1955, #41 SW¼ SE¼ SW¼ SEC. 5
HAYES & ZAPP 1955, #40 NE¼ NW¼ SW¼ SEC. 5
HAYES & ZAPP 1955, #39 SW¼ SW¼ SW¼ SEC. 5
HAYES & ZAPP 1955, #38 SW¼ NE¼ SW¼ SEC. 7
HAYES & ZAPP 1955, #37 SW¼ NE¼ SW¼ SEC. 18
HAYES & ZAPP #48 NW¼ SW¼ SW¼ SEC. ¼
HAYES & ZAPP 1955, #47 NE¼ SW¼ SE¼ SEC. 15
HAYES & ZAPP 1955, #46 SE¼ NE¼ NW¼ SEC. 22
BAUER & REESIDE 1921, #9 SW¼ SE¼ SW¼ SEC. 15
HAYES & ZAPP 1955, #45 SE¼ SE¼ NE¼ SEC. 22
HAYES & ZAPP 1955, #44 SW¼ SE¼ SE¼ SEC. 21
HAYES & ZAPP 1955, + 43 NW¼ NE¼ SW¼ SEC. 28
HAYES & ZAPP 1955, #42 SW¼ SE¼ NE¼ SEC. 32
HAYES & ZAPP 1955, #41 SW¼ SE¼ SW¼ SEC. 5
HAYES & ZAPP 1955, #40 NE¼ NW¼ SW¼ SEC. 5
HAYES & ZAPP 1955, #39 SW¼ SW¼ SW¼ SEC. 5
HAYES & ZAPP 1955, #38 SW¼ NE¼ SW¼ SEC. 7
HAYES & ZAPP 1955, #37 SW¼ NE¼ SW¼ SEC. 18

T. 32 N., R. 13 W.
T. 32 N. R. 14 W.
T. 32 N., R. 13 W.
T. 31 N. R. 13 W.
HAYES & ZAPP 1955, #96 NW¼ SE¼ NW¼ SEC. 31
HAYES & ZAPP #100 SE¼ SE¼ SW¼ SEC. 17
HAYES & ZAPP #99 NW¼ NW¼ NW¼ SEC. 19
HAYES & ZAPP 1955, #98 NE¼ NE¼ SE¼ SEC. 24
HAYES & ZAPP 1955, #97 SE¼ NW¼ NE¼ SEC. 30
HAYES & ZAPP #50 NW¼ NW¼ SE¼ SEC. 31
HAYES & ZAPP #96 NW¼ NW¼ NE¼ SEC. 6

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY

DAMES & MOORE

1979

PLATE 3
SHEET 2 OF 2
COAL DATA SHEET

Compiled in 1979

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

OPEN FILE REPORT 79-110
PLATE 3 OF 15

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Survey editorial standards or stratigraphic nomenclature. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
SAN JUAN COUNTY-LA PLATA COUNTY

OPEN FILE REPORT 79-1110
PLATE 4 OF 16

EXPLANATION

0
5

ISOPACHS OF THE FRUITLAND I COAL BED - Showing thickness, in feet. Isopach interval 5 feet (1.5 meters). Isopachs dashed where inferred.

○22
DRILL HOLE - Showing thickness of the Fruitland I coal bed, in feet.

17.1 Fr 1 16

TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed, and coal thickness, in feet, measured at triangle or line of measured section. Arrow points to coal-bearing area. Dashed where inferred, dotted where concealed.

FAULT - Dashed where approximately located; bar and ball on downthrown side.

To convert feet to meters, multiply feet by 0.3048.

Fruitland coal beds isopached as a single bed on this map are equivalent in stratigraphic position but may not be continuous.

Base from U.S. Geological Survey 1963

Compiled in 1979

SCALE 1 24 000

1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

NEW MEXICO
QUADRANGLE LOCATION

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY

DAMES & MOORE

1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 4

ISOPACH MAP OF THE FRUITLAND I COAL BED

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 5 OF 16

EXPLANATION

6000
5600

STRUCTURE CONTOURS - Drawn on top of the Fruitland I coal bed. Contour interval 400 feet (122 meters). Datum is mean sea level. Contours dashed where projected through nonoutcrop-bearing area. Supplemental 3,700-foot (1,128-meter) and 3,800-foot (1,158-meter) structure contours added.

5457

DRILL HOLE - Showing altitude at the top of the Fruitland I coal bed, in feet.

Fr I

TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed. Arrow points to coal-bearing area. Dashed where inferred, dotted where concealed.

FAULT - Dashed where approximately located; bar and ball on downthrown side.

To convert feet to meters, multiply feet by 0.3048.

Fruitland coal beds contoured as a single surface on this map are equivalent in stratigraphic position but may not be continuous.

Base from U.S. Geological Survey 1963

Compiled in 1979

SCALE 1:24 000

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

NEW MEXICO
QUADRANGLE LOCATION

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY
DAMES & MOORE
1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 5
STRUCTURE CONTOUR MAP
OF THE FRUITLAND I COAL BED

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 6 OF 16

EXPLANATION

1200

OVERBURDEN ISOPACHS - Showing thickness of overburden, in feet, from the surface to the top of the Fruitland I coal bed. Isopach interval 400 feet (122 meters). Isopachs long dashed where inferred, short dashed where projected through noncoal-bearing area. Supplemental 200-foot (61-meter) and 1,000-foot (305-meter) overburden isopachs added.

O1846

DRILL HOLE - Showing thickness of overburden, in feet, from the surface to the top of the Fruitland I coal bed.

15

MINING-RATIO CONTOUR FOR FRUITLAND I COAL BED - Number indicates cubic yards of overburden per ton of recoverable coal by surface-mining methods. Contours shown only in areas suitable for surface mining within the strippable limit. Stripping limit is 200 feet (61 meters) of overburden.

FAULT - Dashed where approximately located; bar and ball on downthrown side.

To convert cubic yards per ton to cubic meters per metric ton, multiply cubic yards per ton by 0.842.

To convert feet to meters, multiply feet by 0.3048.

Base from U.S. Geological Survey, 1963

Compiled in 1979

SCALE 1:24 000

1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

1°41' 30 MILS
13° 231 MILS

NEW MEXICO
QUADRANGLE LOCATION

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY

DAMES & MOORE

1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 6

ISOPACH MAP OF OVERBURDEN OF THE FRUITLAND I COAL BED

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 7 OF 15

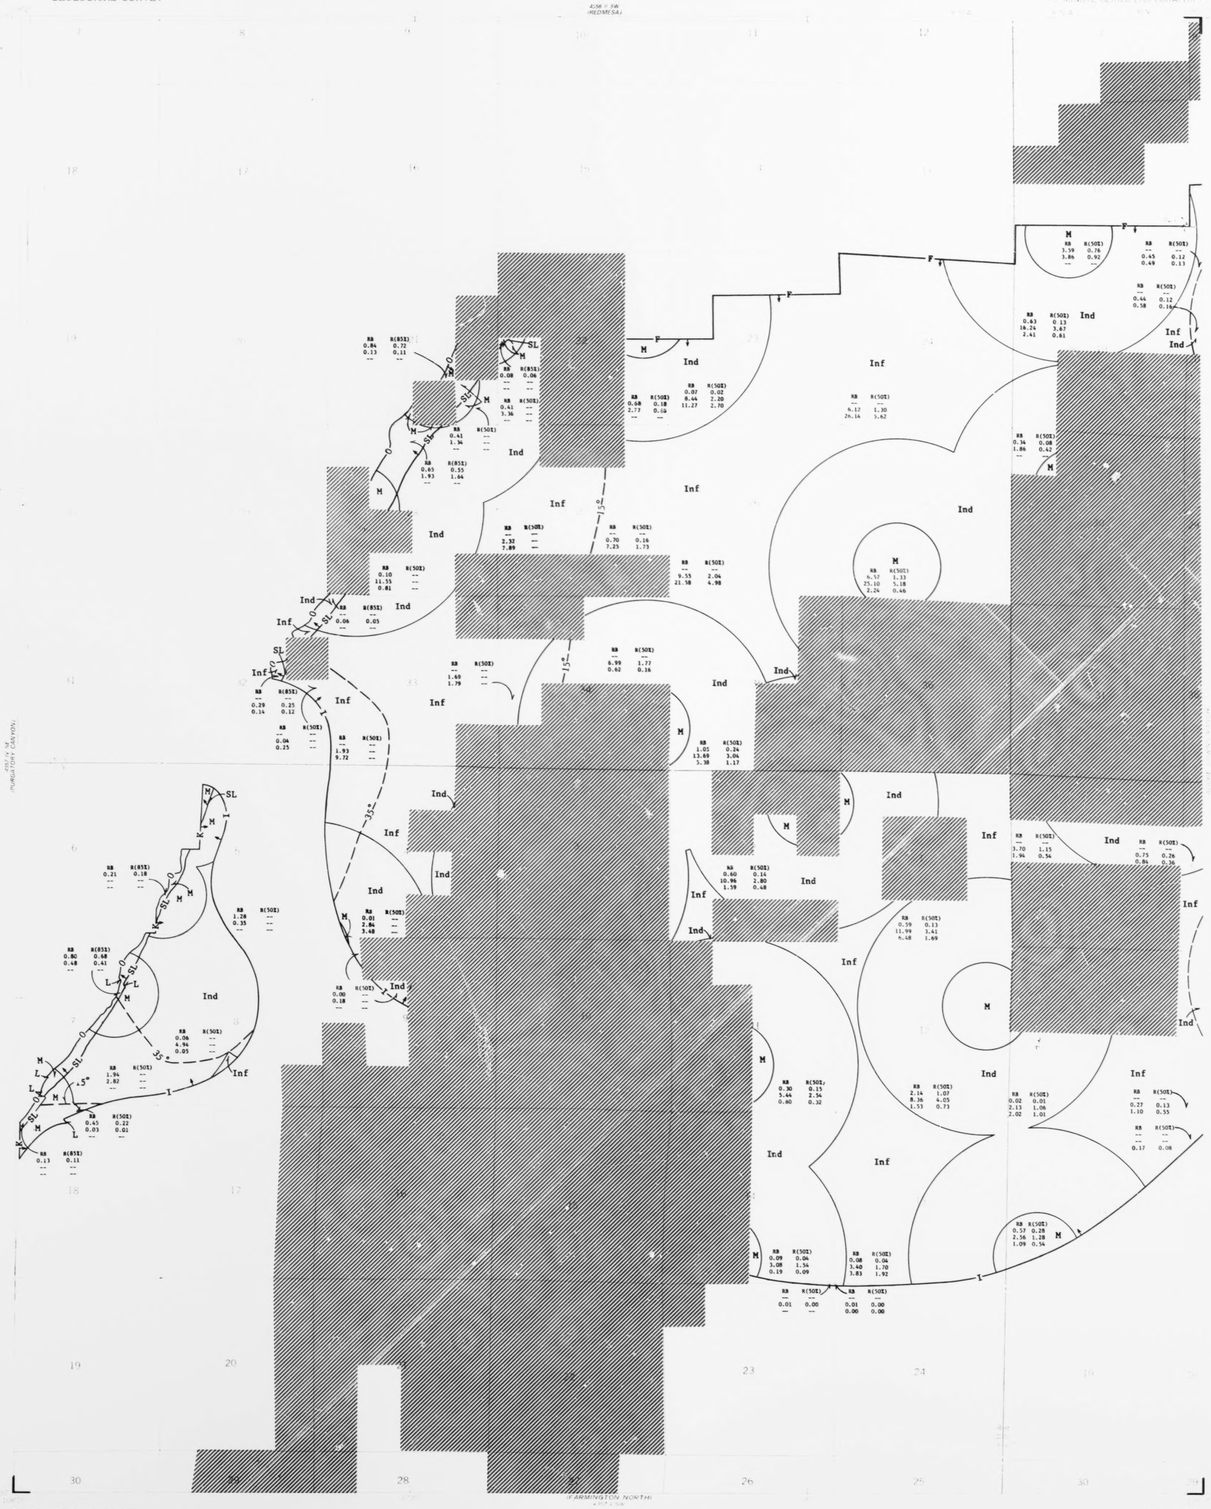

EXPLANATION

NON-FEDERAL COAL LAND - Land within the RRCRA boundary for which the Federal Government does not own the coal rights.

SL

STRIPPING-LIMIT LINE - Boundary for surface mining of the Fruitland I coal bed (in this quadrangle, the 200-foot (61-m) overburden isopach). Arrows point toward the area suitable for surface mining. Recovery factor of 85 percent within that area in this quadrangle.

I

BOUNDARY OF IDENTIFIED RESERVE BASE COAL - Drawn along the coal bed outcrop (O) where the coal is 3 feet (1.5 m) or more thick, the 3-foot (1.5-m) coal isopach (I), the RRCRA boundary (R), the Federal coal lease boundary (F), and a fault line (L). Arrow points toward area of identified Reserve Base coal.

35° Dashed line connects points of equal dip

RB R (85%)
0.65 0.55 (Measured resources)
1.93 1.64 (Indicated resources)
— — (Inferred resources)

IDENTIFIED COAL RESOURCES OF THE FRUITLAND I COAL BED - Showing totals for Reserve Base (RB) and Reserves (R), in millions of short tons, for each section or part(s) of section of Federal coal land within the stripping-limit line. Dash indicates no resources in that category. Reserve Base (RB) x the Recovery Factor (85 percent) = Reserves (R).

RB R (50%)
6.99 — 1.77 (Measured resources)
0.62 — 0.16 (Indicated resources)
(Inferred resources)

IDENTIFIED COAL RESOURCES OF THE FRUITLAND I COAL BED - Showing totals for Reserve Base (RB) and Reserves (R), in millions of short tons, for each section or part(s) of section of Federal coal land outside the stripping-limit line. Dash indicates no resources in that category. Reserve Base (RB) x the Recovery Factor (50 percent) = Reserves (R). No Reserves calculated in parts of sections where dip is greater than 15°.

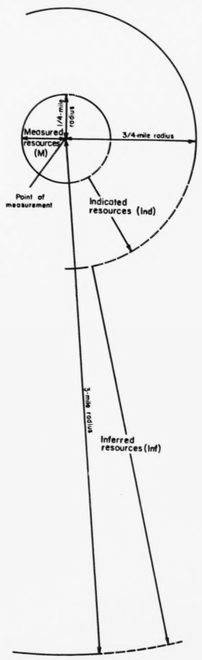

BOUNDARY LINES - Enclosing areas of measured (M), indicated (Ind), and inferred (Inf) coal resources. Dashed where projected from adjacent quadrangles.

To convert short tons to metric tons, multiply short tons by 0.9072.

To convert miles to kilometers, multiply miles by 1.609

Values given for strippable and subsurface Reserve (R) tonnages represent 85% and 50%, respectively, of the calculated Reserve Base (RB) values. Calculated Reserve Base and Reserve values have been rounded off to the nearest 10,000 tons of coal.

Reserve Base and Reserve values of 0.00 represent resources of less than 5,000 tons of coal.

Base from U.S. Geological Survey, 1963

Compiled in 1979

SCALE 1:24 000
1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

NEW MEXICO
QUADRANGLE LOCATION

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY

DAMES & MOORE

1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 7

AREAL DISTRIBUTION
AND IDENTIFIED RESOURCES OF THE
FRUITLAND I COAL BED

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

OPEN FILE REPORT 79-1110
PLATE 8 OF 16

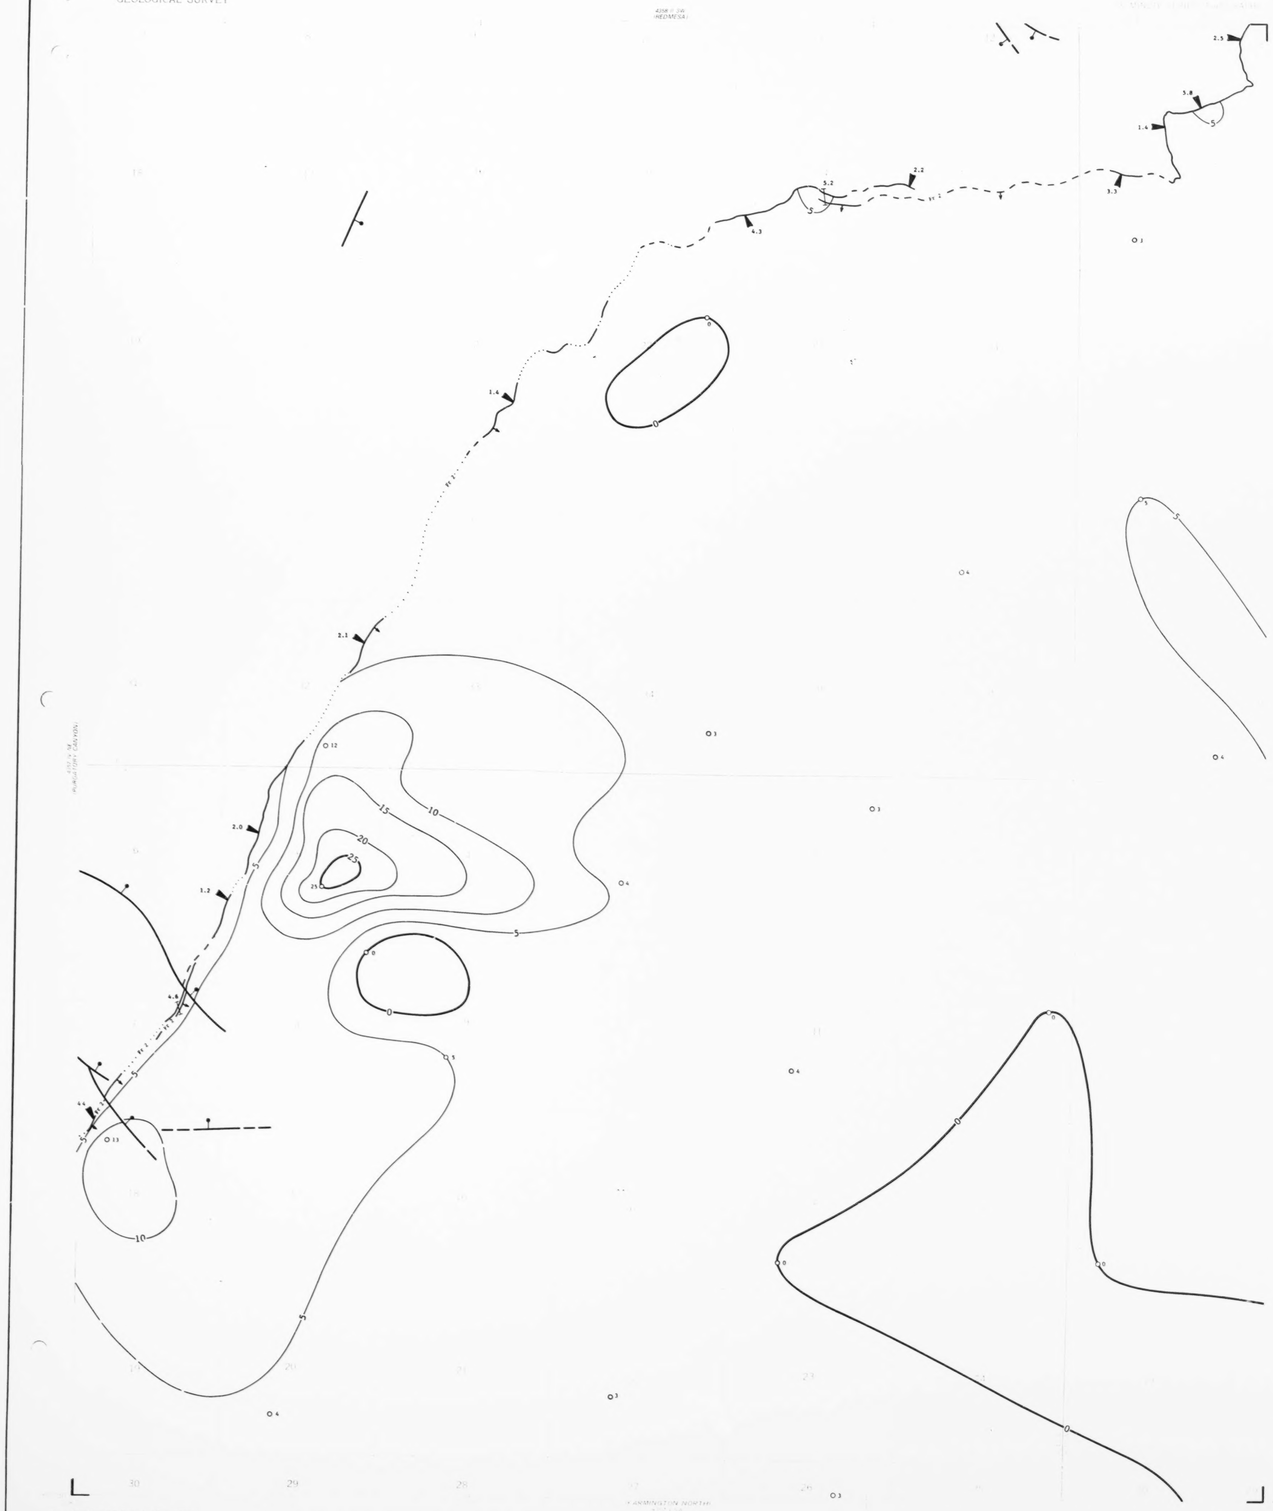

EXPLANATION

0
5

ISOPACHS OF THE FRUITLAND 2 COAL BED - Showing thickness, in feet. Isopach interval 5 feet (1.5 meters). Isopachs dashed where inferred.

DRILL HOLE - Showing thickness of the Fruitland 2 coal bed, in feet.

2.5
Fr 2

TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed, and coal thickness, in feet, measured at triangle or line of measured section. Arrow points to coal-bearing area. Dashed where inferred, dotted where concealed.

FAULT - Dashed where approximately located; bar and ball on downthrown side.

To convert feet to meters, multiply feet by 0.3048.

Fruitland coal beds isopached as a single bed on this map are equivalent in stratigraphic position but may not be continuous.

Base from U.S. Geological Survey, 1963

Compiled in 1979

SCALE 1:24 000

1 MILE
1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET

NEW MEXICO
QUADRANGLE LOCATION

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY
DAMES & MOORE
1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 8

ISOPACH MAP OF THE
FRUITLAND 2 COAL BED

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 9 OF 16

EXPLANATION

6000 ——— ———
6400 ——— ———

STRUCTURE CONTOURS – Drawn on top of the Fruitland 2 coal bed. Contour interval 400 feet (122 meters). Datum is mean sea level. Contours long dashed where inferred, short dashed where projected through noncoal-bearing area. Supplemental 3,800-foot (1,158-meter) structure contour added.

3786

DRILL HOLE – Showing altitude at the top of the Fruitland 2 coal bed, in feet.

Fr 2

TRACE OF COAL BED OUTCROP – Showing symbol of name of coal bed. Arrow points to coal-bearing area. Dashed where inferred, dotted where concealed.

FAULT – Dashed where approximately located; bar and ball on downthrown side.

To convert feet to meters, multiply feet by 0.3048.

Fruitland coal beds contoured as a single surface on this map are equivalent in stratigraphic position but may not be continuous.

Base from U.S. Geological Survey, 1963

Compiled in 1979

SCALE 1:24 000

1 0 1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 0 1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

NEW MEXICO

QUADRANGLE LOCATION

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY

DAMES & MOORE

1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 9

STRUCTURE CONTOUR MAP
OF THE FRUITLAND 2 COAL BED

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 10 OF 16

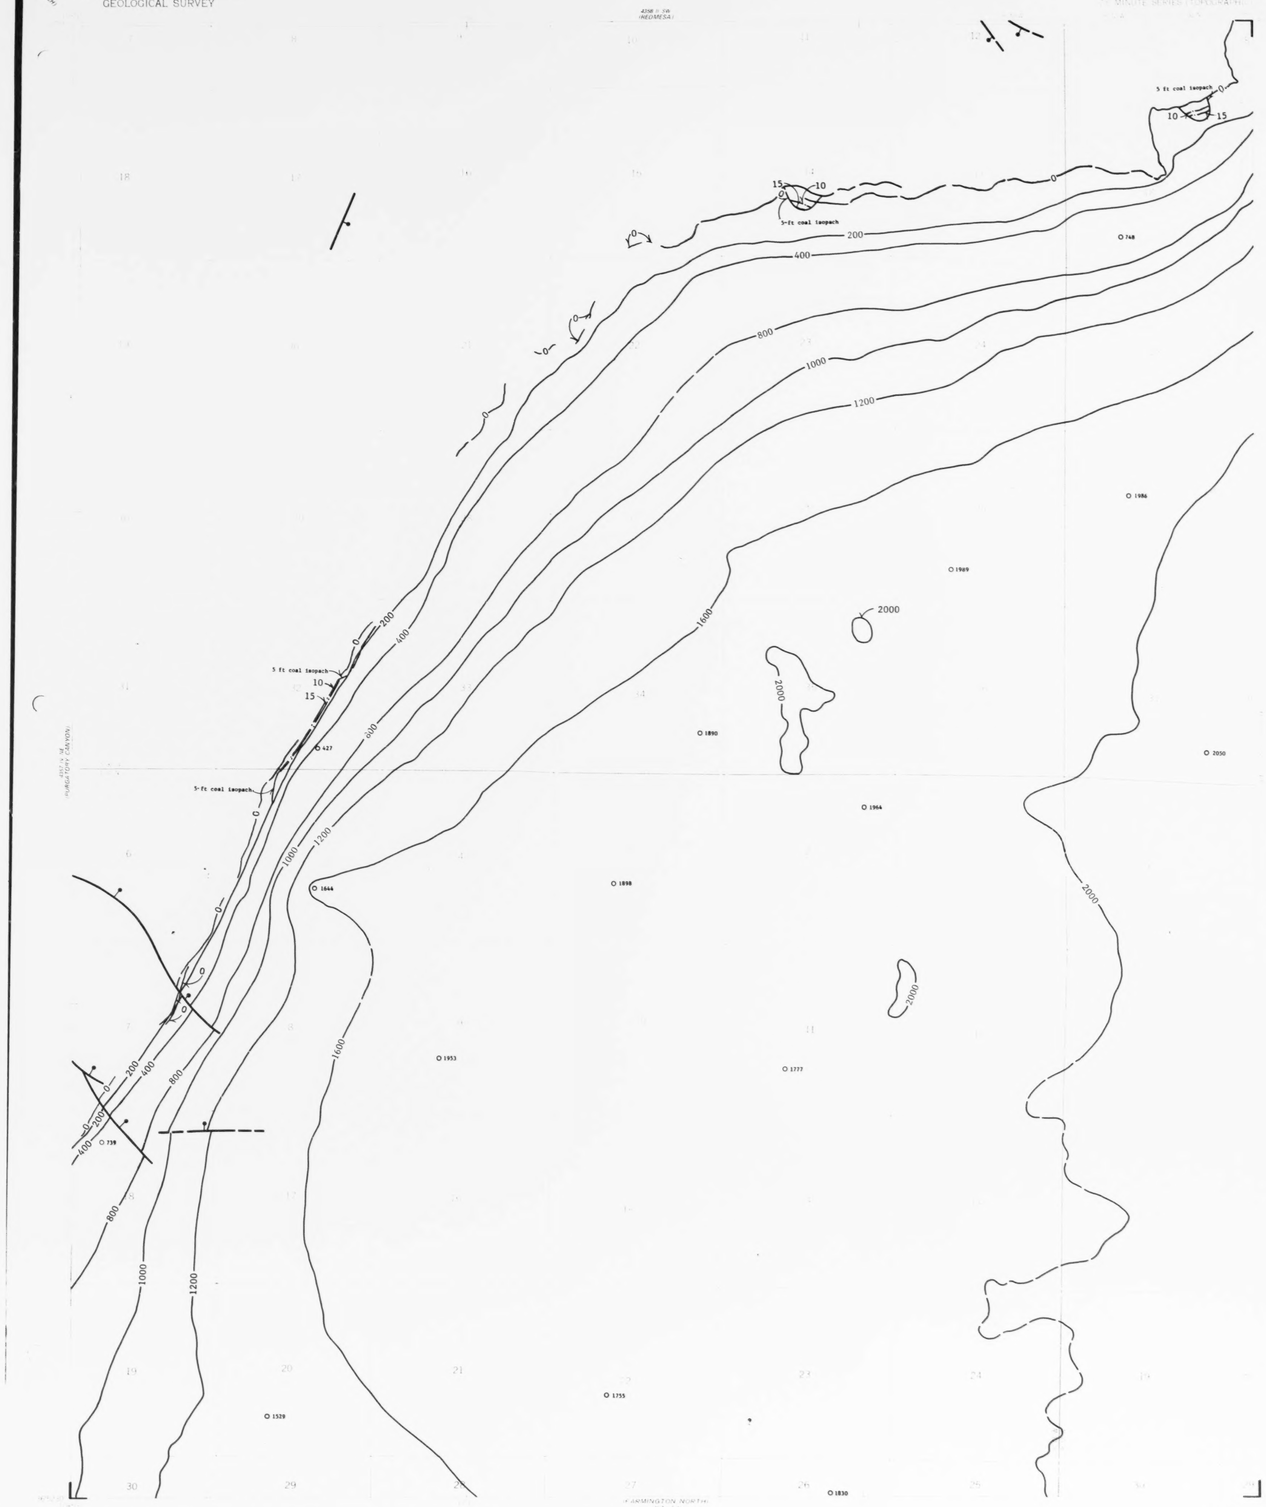

EXPLANATION

2000

OVERBURDEN ISOPACHS - Showing thickness of overburden, in feet, from the surface to the top of the Fruitland 2 coal bed. Isopach interval 400 feet (122 meters). Isopachs long dashed where inferred, short dashed where projected through noncoal-bearing area. Supplemental 200-foot (61-meter) and 1,000-foot (305-meter) overburden isopachs added.

2050

DRILL HOLE - Showing thickness of overburden, in feet, from the surface to the top of the Fruitland 2 coal bed.

10

MINING-RATIO CONTOUR FOR FRUITLAND 2 COAL BED - Number indicates cubic yards of overburden per ton of recoverable coal by surface-mining methods. Contours shown only in areas suitable for surface mining within the strippable limit. Stripping limit is 200 feet (61 meters) of overburden.

To convert cubic yards per ton to cubic meters per metric ton, multiply cubic yards per ton by 0.842.

FAULT - Dashed where approximately located; bar and ball on downthrown side.

To convert feet to meters, multiply feet by 0.3048.

Base from U.S. Geological Survey, 1963

Compiled in 1979

SCALE 1:24 000

1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET
GN MN
1°41' 30 MILS
13° 231 MILS

NEW MEXICO
QUADRANGLE LOCATION

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY
DAMES & MOORE
1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 10

ISOPACH MAP OF OVERBURDEN
OF THE FRUITLAND 2 COAL BED

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE II OF 15

EXPLANATION

NON-FEDERAL COAL LAND – Land within the ERCRA boundary for which the Federal Government does not own the coal rights.

SL

STRIPPING-LIMIT LINE – Boundary for surface mining of the Fruitland 2 coal bed (in this quadrangle, the 200-foot [61-m] overburden limpash). Arrows point toward the area suitable for surface mining. Recovery factor of 85 percent within that area in this quadrangle.

I

BOUNDARY OF IDENTIFIED RESERVE BASE COAL – Drawn along the coal bed outcrop (O), where the coal is 5 feet (1.5 m) or more thick, the 5-foot (1.5-m) coal isopach (I), the ERCRA boundary (E), and a fault line (L); arrow points toward area of identified Reserve Base coal.

35°

Dashed line connects points of equal dip

RB R (85S)
0.08 0.07 (Measured resources)
0.04 0.03 (Indicated resources)
-- -- (Inferred resources)

IDENTIFIED COAL RESOURCES OF THE FRUITLAND 2 COAL BED – Showing totals for Reserve Base (RB) and Reserves (R), in millions of short tons, for each section or part(s) of section of Federal coal land within the stripping-limit line. Dash indicates no resources in that category. Reserve Base (RB) x the Recovery Factor (85 percent) = Reserves (R).

RB R (50S)
-- -- (Measured resources)
0.47 0.23 (Indicated resources)
5.27 2.64 (Inferred resources)

IDENTIFIED COAL RESOURCES OF THE FRUITLAND 2 COAL BED – Showing totals for Reserve Base (RB) and Reserves (R), in millions of short tons, for each section or part(s) of section of Federal coal land outside the stripping-limit line. Dash indicates no resources in that category. Reserve Base (RB) x the Recovery Factor (50 percent) = Reserves (R). No Reserves calculated in parts of sections where dip is greater than 15°.

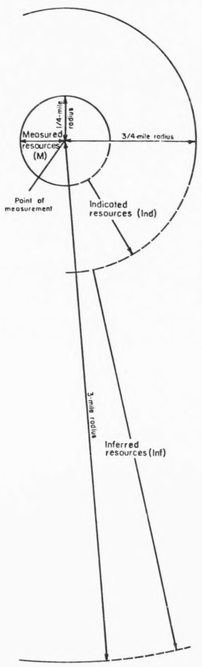

BOUNDARY LINES – Enclosing areas of measured (M), indicated (Ind), and inferred (Inf) coal resources. Dashed where projected from adjacent quadrangles.

To convert short tons to metric tons, multiply short tons by 0.9072.

To convert miles to kilometers, multiply miles by 1.609.

Values given for strippable and subsurface Reserve (R) tonnages represent 85% and 50%, respectively, of the calculated Reserve Base (RB) values. Calculated Reserve Base and Reserve values have been rounded off to the nearest 10,000 tons of coal.

Base from U.S. Geological Survey, 1963

Compiled in 1979

SCALE 1:24 000

1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

1°41 30 MILS
13° 231 MILS

UTM GRID AND 1979 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

NEW MEXICO

QUADRANGLE LOCATION

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY
DAMES & MOORE
1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE II

AREAL DISTRIBUTION
AND IDENTIFIED RESOURCES OF THE
FRUITLAND 2 COAL BED

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 12 OF 16

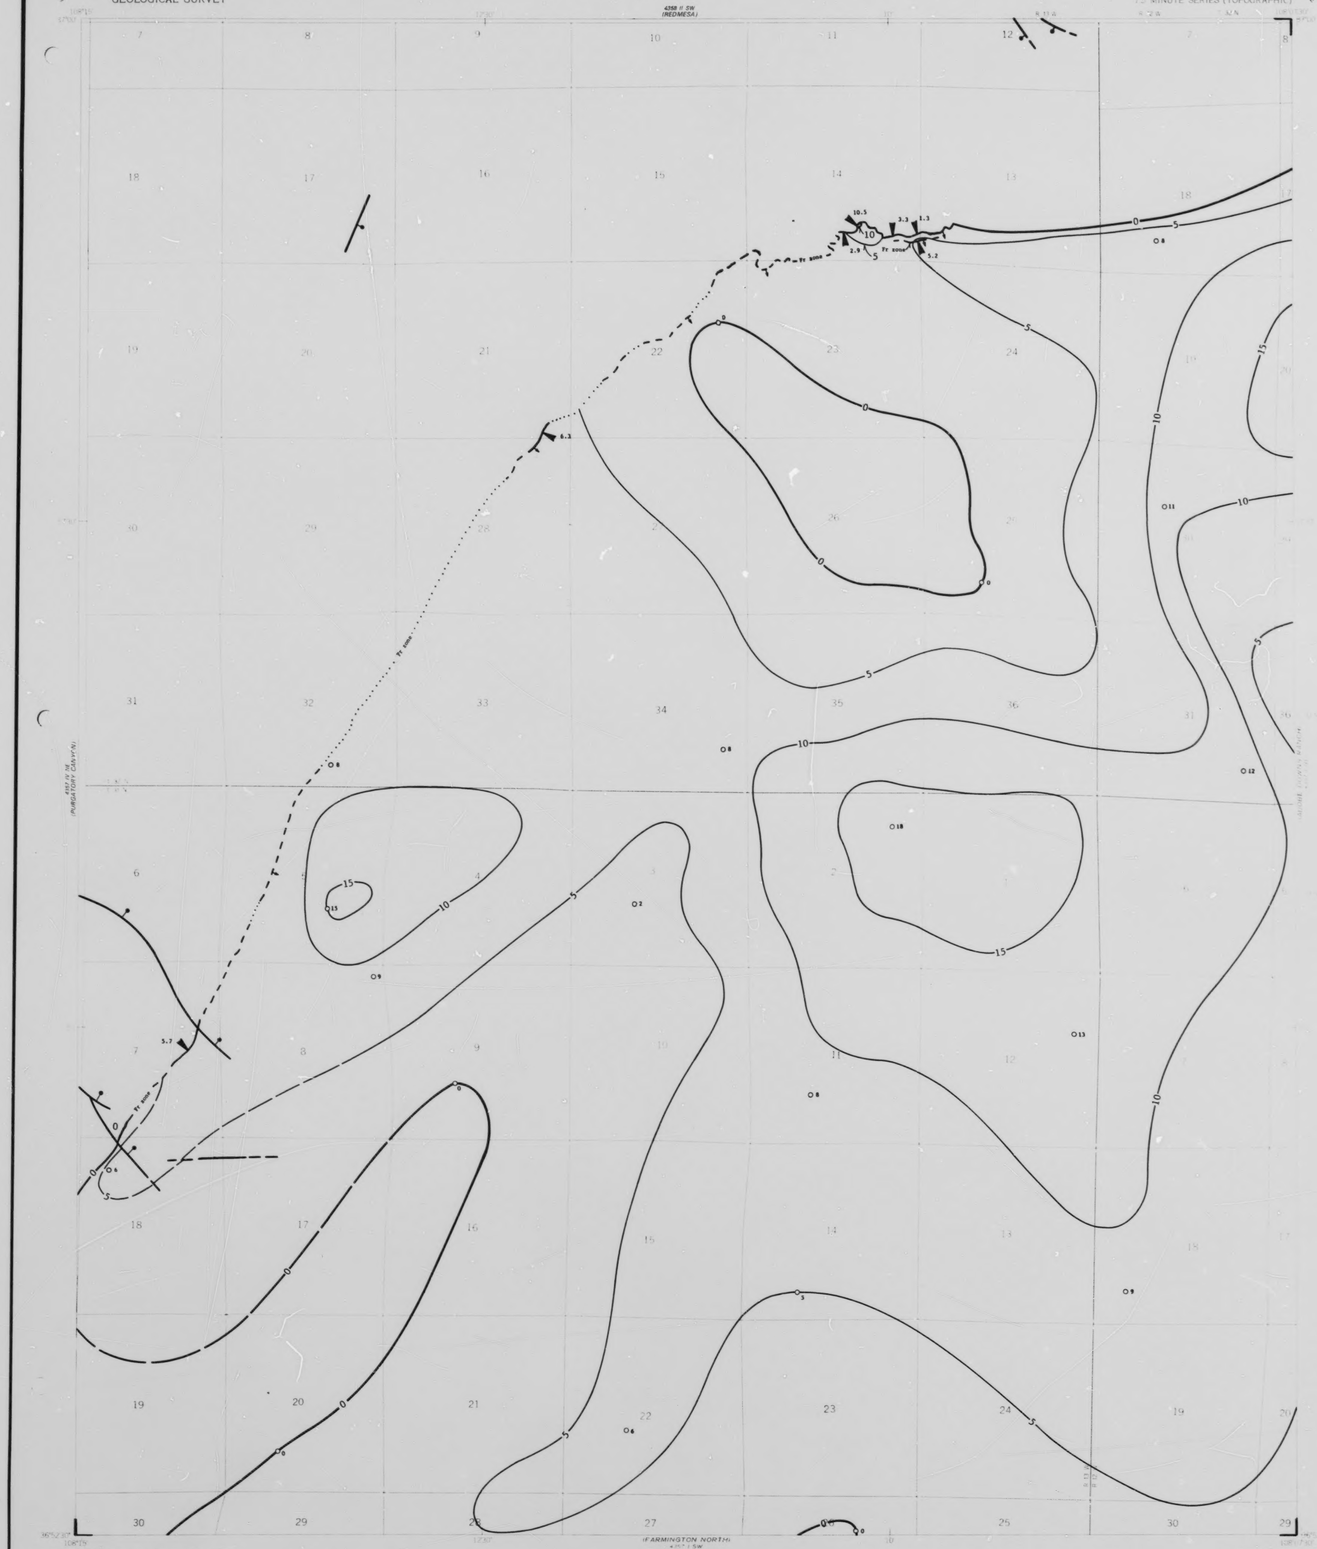

EXPLANATION

0
5

ISOPACHS OF THE FRUITLAND ZONE COAL BEDS - Showing total coal thickness, in feet. Isopach interval 5 feet (1.5 meters). Isopachs dashed where inferred.

DRILL HOLE - Showing total thickness of Fruitland zone coal beds, in feet.

Fr zone

TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed. Showing each interval and coal thickness, in feet, measured at triangle. Index number refers to measured section on Plate 3 of CRO map. Arrow points toward the coal-bearing area. Dashed where inferred, dotted where concealed.

FAULT - Dashed where approximately located; bar and ball on downthrown side.

To convert feet to meters, multiply feet by 0.3048.

Base from U.S. Geological Survey,1963

Compiled in 1979

SCALE 1:24 000

1 0 1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 0 1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

GN MN
1°41' 13°
30 MILS 231 MILS

UTM GRID AND 1979 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET

NEW MEXICO

QUADRANGLE LOCATION

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY
DAMES & MOORE
1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 12
ISOPACH MAP OF THE TOTAL COAL
OF THE FRUITLAND COAL ZONE

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 13 OF 16

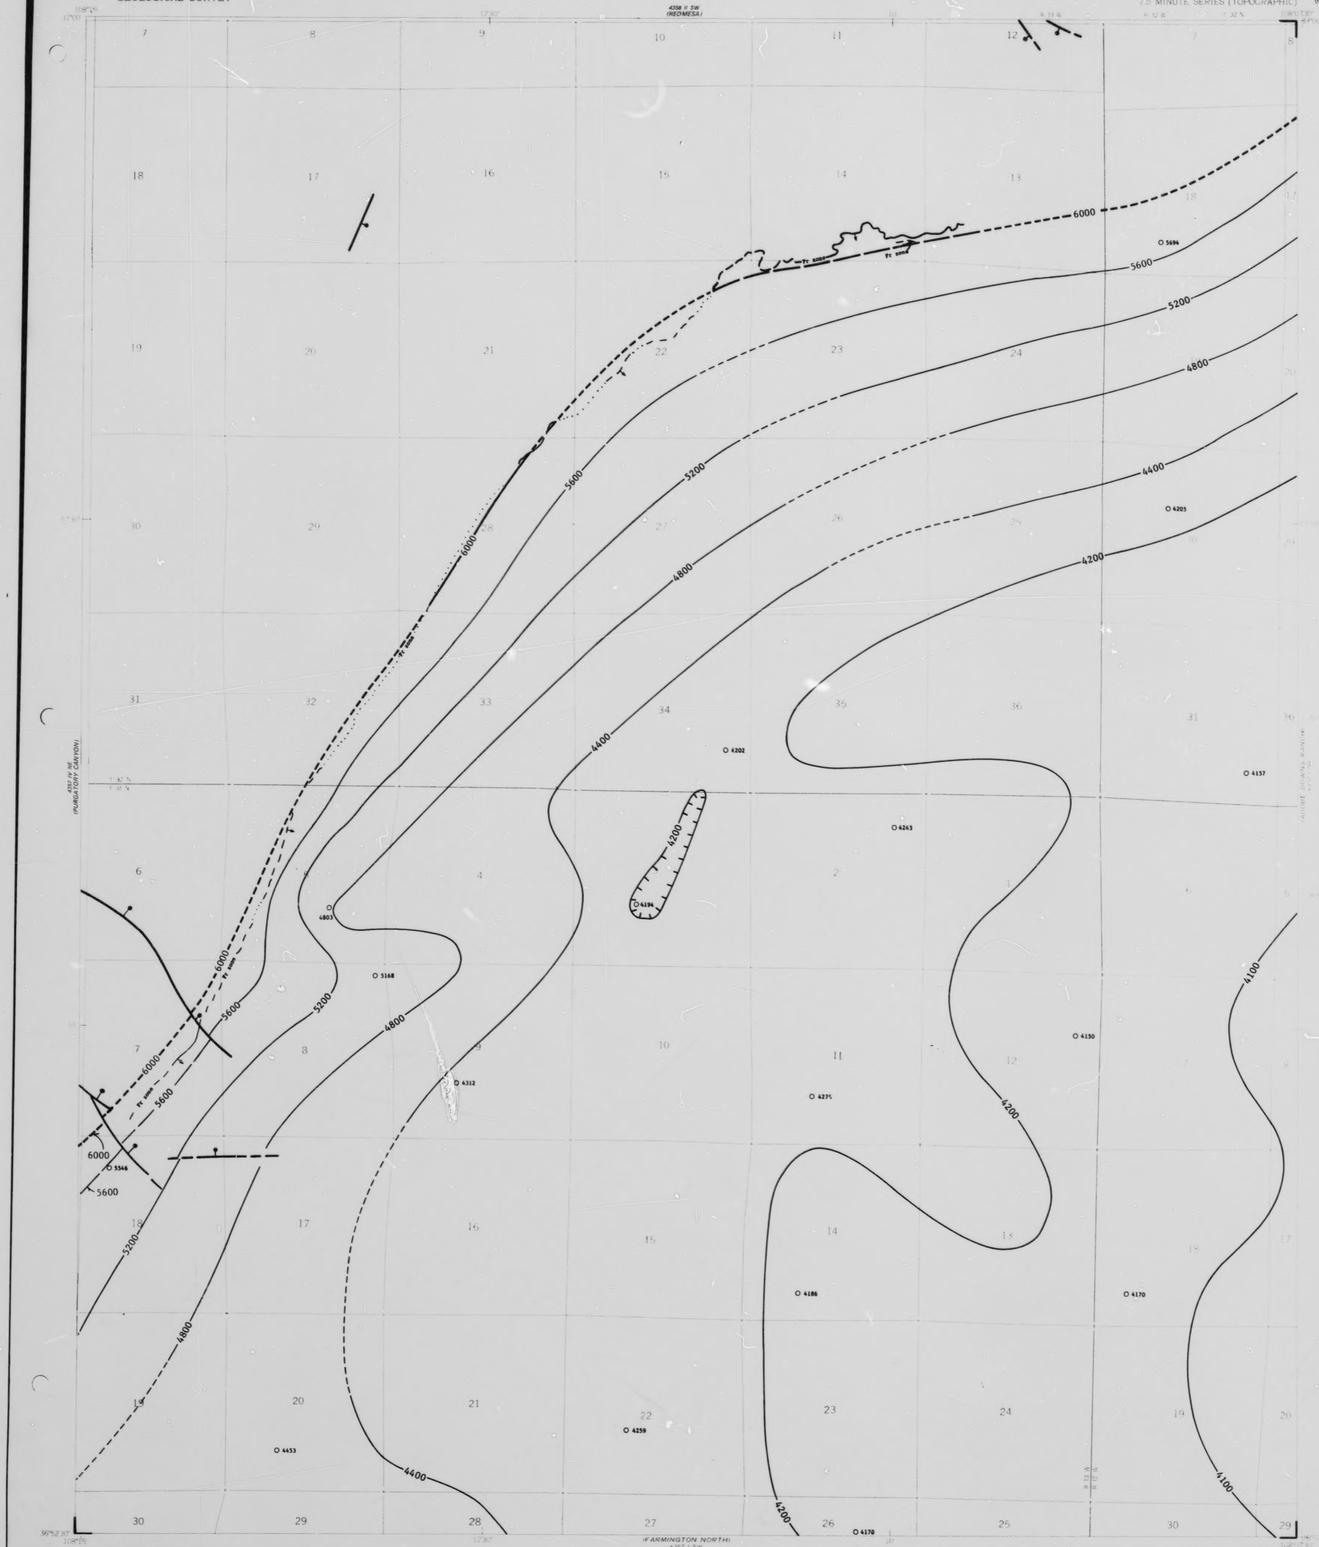

EXPLANATION

5600
6000
4200

STRUCTURE CONTOURS - Drawn on top of the Fruitland coal zone, which is coincident with the top of the Fruitland Formation. Hachures indicate closed depression. Contour interval 400 feet (122 meters). Datum is near sea level. Contours dashed where projected through noncoal-bearing area. Supplemental 4100-foot (1250 meter) and 4200-foot (1280 meter) structure contours added.

4202

DRILL HOLE - Showing altitude at the top of the Fruitland coal zone, in feet.

Ft zone

TRACE OF COAL BED OUTCROP - Showing symbol of zone of coal bed. Arrow points to coal-bearing area. Dashed where inferred, dotted where concealed.

FAULT - Dashed where approximately located; bar and ball on downthrown side.

To convert feet to meters, multiply feet by 0.3048.

Base from U.S. Geological Survey, 1963

Compiled in 1979

SCALE 1:24 000

1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 5 0 1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET

1°41'
30 MILS

13°
231 MILS

NEW MEXICO

QUADRANGLE LOCATION

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY

DAMES & MOORE

1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 13

STRUCTURE CONTOUR MAP
OF THE FRUITLAND COAL ZONE

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 14 OF 16

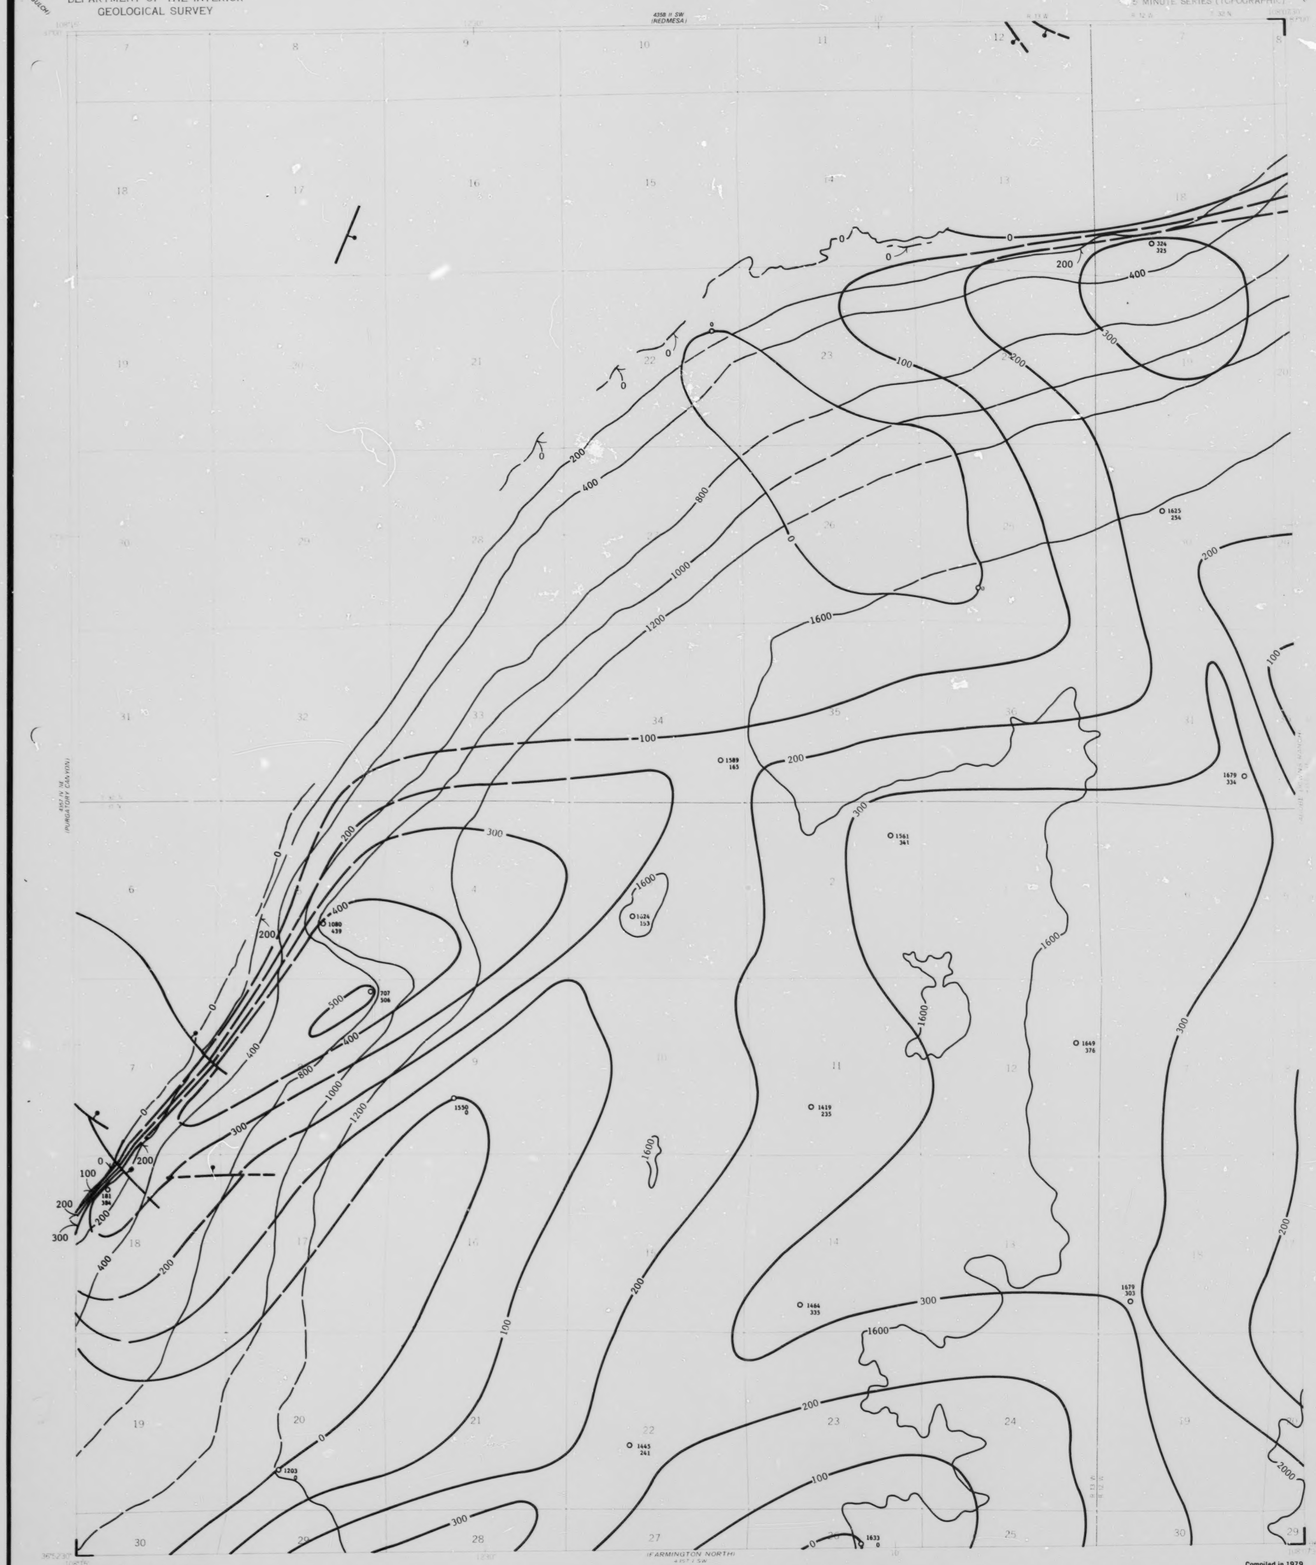

Base from U.S. Geological Survey, 1963

Compiled in 1979

SCALE 1:24 000

1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET

QUADRANGLE LOCATION

EXPLANATION

1200

OVERBURDEN ISOPACHS - Showing thickness of overburden, in feet, from the surface to the top of the Fruitland coal zone, which is coincident with the top of the Fruitland Formation. Isopach interval 400 feet (122 meters). Isopachs long dashed where inferred, short dashed where projected through conceal-bearing area. Supplemental 200-foot (61-meter) and 1000-foot (305-meter) overburden isopachs added.

300

INTERBURDEN ISOPACHS - Showing thickness of interburden, in feet, within the Fruitland coal zone. Isopach interval 100 feet (30.5 meters). Isopachs dashed where inferred.

324
325

DRILL HOLE - Showing thickness of overburden, in feet, (upper number) from the surface to the top of the Fruitland coal zone and thickness of interburden, in feet, (lower number) within the Fruitland coal zone.

FAULT - Dashed where approximately located; bar and ball on downthrown side.

To convert feet to meters, multiply feet by 0.3048.

The Fruitland coal zone extends from the top of the Fruitland Fm to the base of the lowermost coal which is designated, on CRO Plate 3, as a Fruitland zone coal bed. The Fruitland zone overburden is determined by subtracting the elevation of the top of the Fruitland Fm (CRO Plate 3) from the ground level elevation. The interburden is the total rock thickness from the top of the Fruitland Fm to the top of the lowermost coal which is designated as a Fruitland zone coal bed.

COAL RESOURCE OCCURRENCE MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY

DAMES & MOORE

1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 14

ISOPACH MAP OF OVERBURDEN
AND INTERBURDEN
OF THE FRUITLAND COAL ZONE

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 15 OF 16

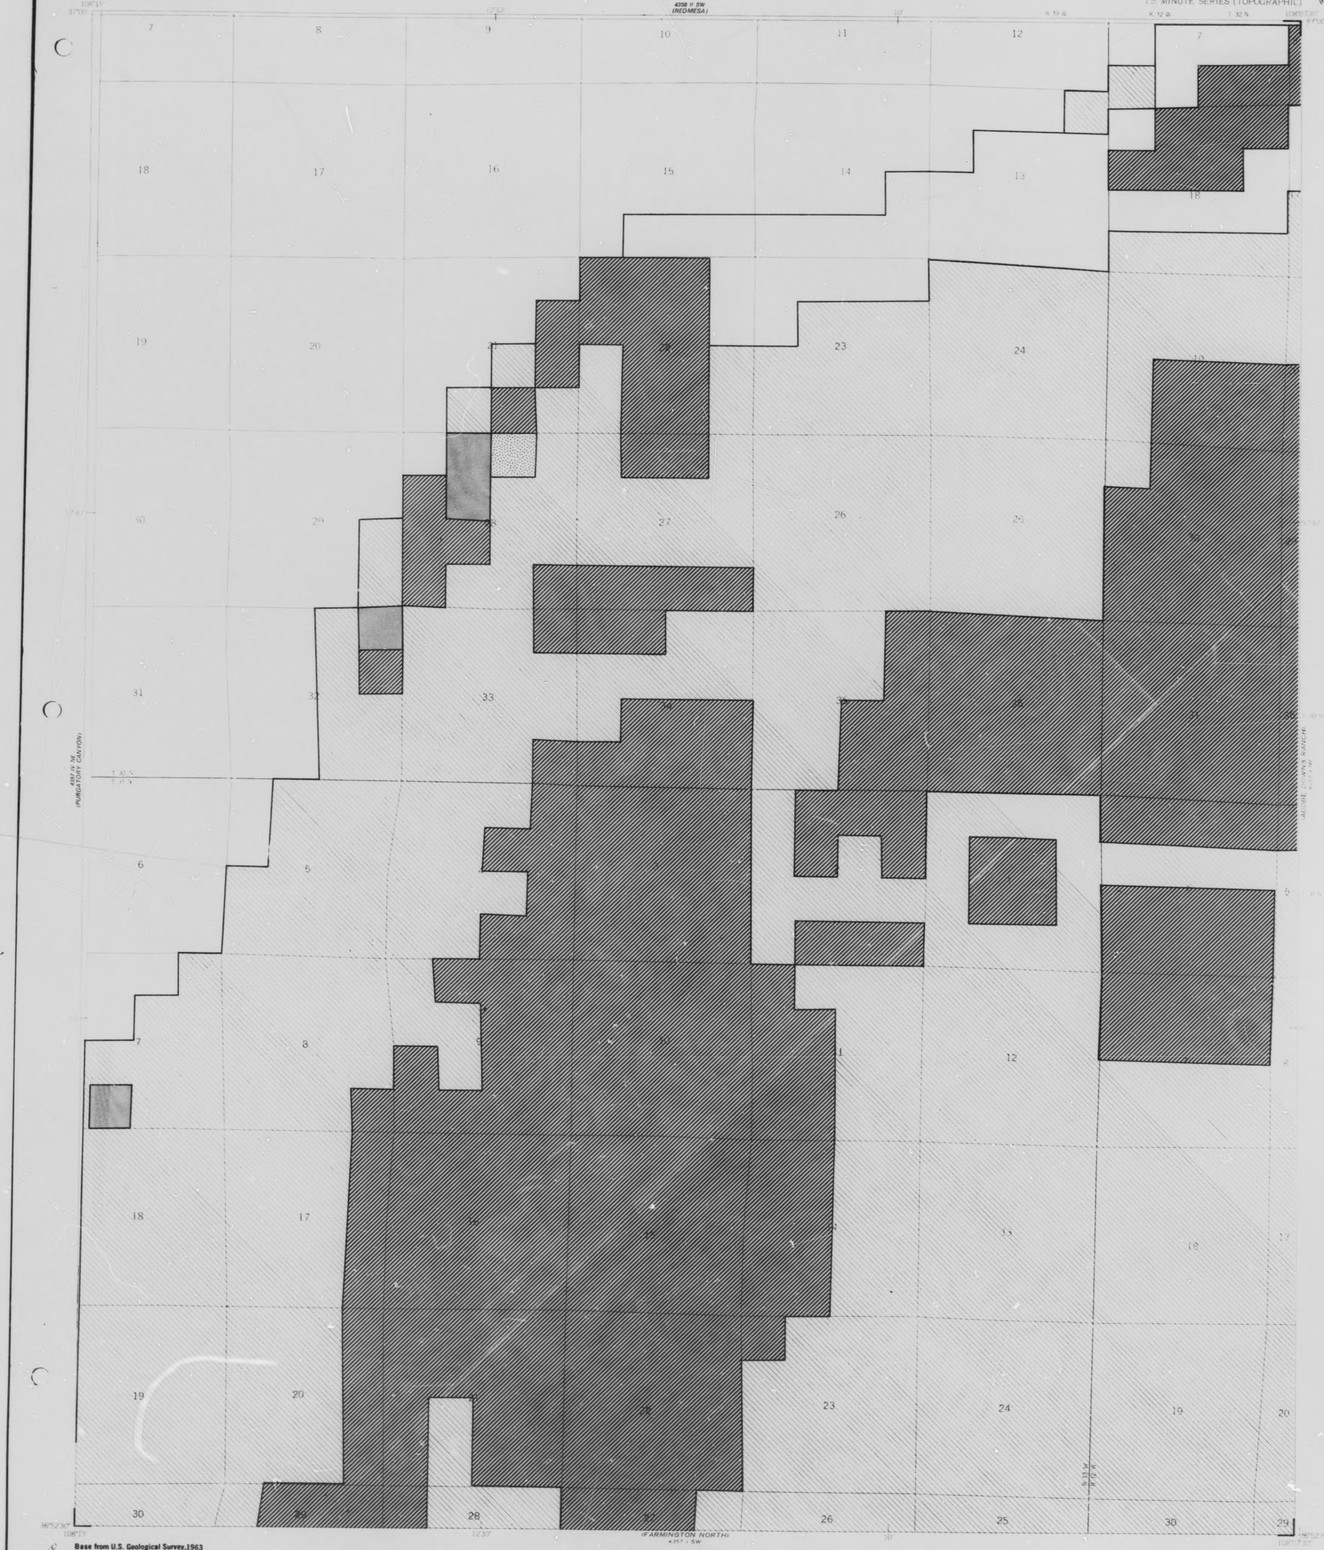

EXPLANATION

NON-FEDERAL COAL LAND - Land for which the Federal Government does not own the coal rights, and for which the coal-development potential is not rated.

AREA OF HIGH COAL DEVELOPMENT POTENTIAL FOR SURFACE MINING METHODS - Includes areas underlain by coal of the Fruitland 1 bed. Area has mining-ratio values ranging from 0 to 10.

AREA OF SUBNORM COAL DEVELOPMENT POTENTIAL FOR SURFACE MINING METHODS - Includes areas with coal thickness less than 5 feet (1.5 m).

AREA OF NO COAL DEVELOPMENT POTENTIAL FOR SURFACE MINING METHODS - Includes areas beyond stripping limit, outside outcrop, but within ERCRA.

Unpatterned areas are Federal coal lease lands or outside the ERCRA.

SCALE 1:24 000

1 0 1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 5 0 1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET

NEW MEXICO
QUADRANGLE LOCATION

COAL DEVELOPMENT POTENTIAL MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY
DAMES & MOORE
1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey.

PLATE 15
COAL DEVELOPMENT POTENTIAL
FOR SURFACE MINING METHODS

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LA PLATA QUADRANGLE
NEW MEXICO-COLORADO
7.5 MINUTE SERIES (TOPOGRAPHIC)

OPEN FILE REPORT 79-1110
PLATE 16 OF 16

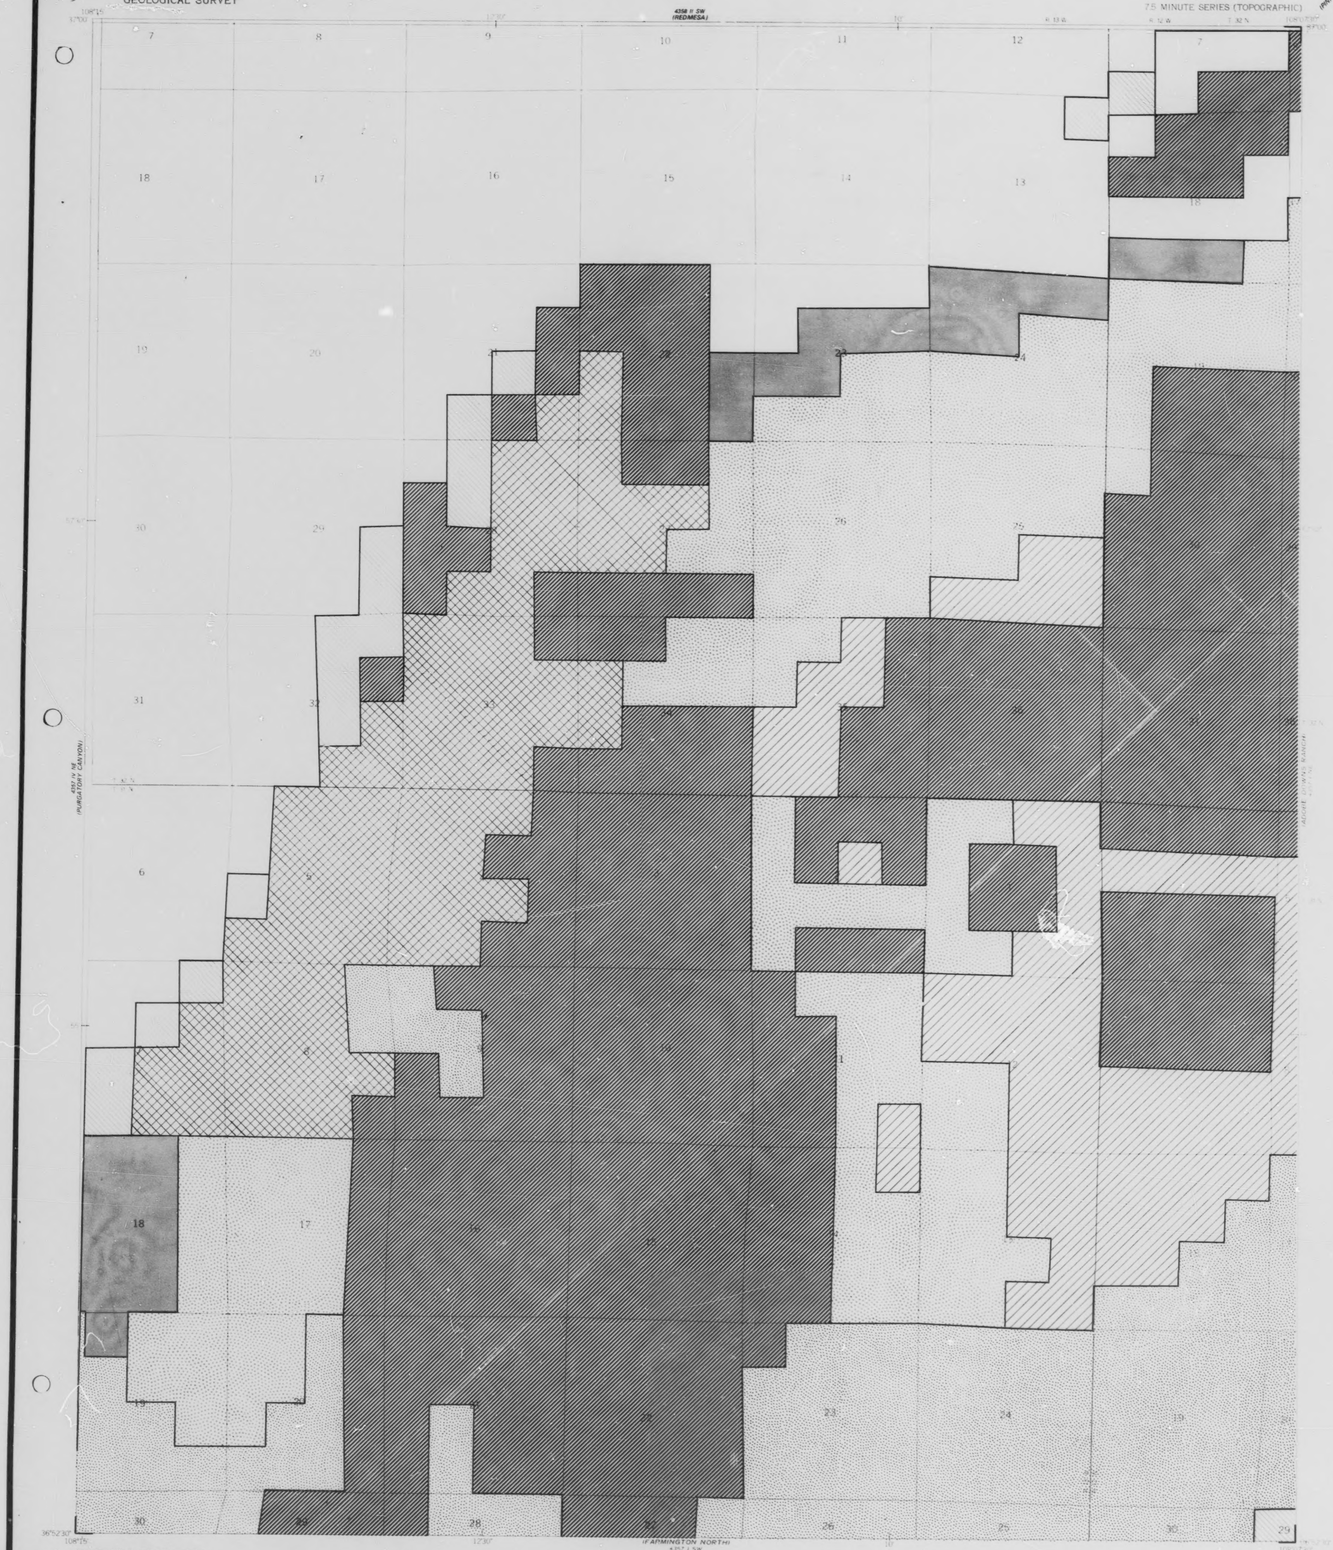

EXPLANATION

NON-FEDERAL COAL LAND - Land for which the Federal Government does not own the coal rights, and for which the coal-development potential is not rated.

AREA OF HIGH COAL DEVELOPMENT POTENTIAL FOR SUBSURFACE MINING METHODS - Includes areas underlain by coal of the Fruitland 1 and Fruitland 2 beds. Area has overburden ranging in thickness from 200 to 1000 feet (61-305 m).

AREA OF MODERATE COAL DEVELOPMENT POTENTIAL FOR SUBSURFACE MINING METHODS - Includes areas underlain by coal of the Fruitland 1 and Fruitland 2 beds. Area has overburden thickness ranging from 1000 to 2000 feet (305-610 m).

AREA OF LOW COAL DEVELOPMENT POTENTIAL FOR SUBSURFACE MINING METHODS - Includes areas underlain by coal of the Fruitland 1 bed. Area has overburden thickness ranging from 2000 to 3000 feet (610-914 m).

AREA OF LOW COAL DEVELOPMENT POTENTIAL FOR IN-SITU GASIFICATION METHODS - Includes areas underlain by coal of the Fruitland 1 and Fruitland 2 beds where the dip of the coal beds is 1° to 35° or where the dip is 35° to 90° and there are less than 50 million tons of coal in place.

AREA OF UNKNOWN COAL DEVELOPMENT POTENTIAL FOR SUBSURFACE MINING METHODS - Includes areas with coal thickness less than 5 feet (1.5 m).

AREA OF NO COAL DEVELOPMENT POTENTIAL FOR SUBSURFACE MINING METHODS - Includes areas within the RRCRA that are inside the stripping limit, outside outcrop, and areas with no Fruitland 1 or Fruitland 2 coal.

- Unpatterned areas are Federal coal lease lands or outside the RRCRA.

Base from U.S. Geological Survey, 1963

Compiled in 1979

SCALE 1:24 000

1 0 1 MILE
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 0 1 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UTM GRID AND 1979 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET

1°41'
30 MILS

13°
231 MILS

NEW MEXICO

QUADRANGLE LOCATION

COAL DEVELOPMENT POTENTIAL MAP OF THE LA PLATA QUADRANGLE, SAN JUAN COUNTY, NEW MEXICO AND LA PLATA COUNTY, COLORADO

BY
DAMES & MOORE
1979

This map was prepared under contract to the U.S. Geological Survey and has not been edited for conformity with Geological Survey editorial standards. Opinions and conclusions expressed herein do not necessarily represent those of the Geological Survey

PLATE 16
COAL DEVELOPMENT POTENTIAL FOR SUBSURFACE MINING AND IN-SITU GASIFICATION METHODS